



Review

Application of Electrochemical Oxidation for Water and Wastewater Treatment: An Overview

Mohammad Saleh Najafinejad ¹, Simeone Chianese ¹, Angelo Fenti ^{1,*}, Pasquale Iovino ²
and Dino Musmarra ^{1,*}

¹ Department of Engineering, University of Campania “Luigi Vanvitelli”, Via Roma 29, 81031 Aversa, Italy; mohammadsaleh.najafinejad@unicampania.it (M.S.N.); simeone.chianese@unicampania.it (S.C.)

² Department of Environmental, Biological and Pharmaceutical Sciences and Technologies, University of Campania “Luigi Vanvitelli”, Via Vivaldi 43, 81100 Caserta, Italy; pasquale.iovino@unicampania.it

* Correspondence: angelo.fenti@unicampania.it (A.F.); dino.musmarra@unicampania.it (D.M.)

Abstract: In recent years, the discharge of various emerging pollutants, chemicals, and dyes in water and wastewater has represented one of the prominent human problems. Since water pollution is directly related to human health, highly resistant and emerging compounds in aquatic environments will pose many potential risks to the health of all living beings. Therefore, water pollution is a very acute problem that has constantly increased in recent years with the expansion of various industries. Consequently, choosing efficient and innovative wastewater treatment methods to remove contaminants is crucial. Among advanced oxidation processes, electrochemical oxidation (EO) is the most common and effective method for removing persistent pollutants from municipal and industrial wastewater. However, despite the great progress in using EO to treat real wastewater, there are still many gaps. This is due to the lack of comprehensive information on the operating parameters which affect the process and its operating costs. In this paper, among various scientific articles, the impact of operational parameters on the EO performances, a comparison between different electrochemical reactor configurations, and a report on general mechanisms of electrochemical oxidation of organic pollutants have been reported. Moreover, an evaluation of cost analysis and energy consumption requirements have also been discussed. Finally, the combination process between EO and photocatalysis (PC), called photoelectrocatalysis (PEC), has been discussed and reviewed briefly. This article shows that there is a direct relationship between important operating parameters with the amount of costs and the final removal efficiency of emerging pollutants. Optimal operating conditions can be achieved by paying special attention to reactor design, which can lead to higher efficiency and more efficient treatment. The rapid development of EO for removing emerging pollutants from impacted water and its combination with other green methods can result in more efficient approaches to face the pressing water pollution challenge. PEC proved to be a promising pollutants degradation technology, in which renewable energy sources can be adopted as a primer to perform an environmentally friendly water treatment.

Keywords: emerging pollutants; wastewater treatment; electrochemical oxidation; role of operational parameters; cost analysis assessment; photoelectrocatalysis



Citation: Najafinejad, M.S.; Chianese, S.; Fenti, A.; Iovino, P.; Musmarra, D. Application of Electrochemical Oxidation for Water and Wastewater Treatment: An Overview. *Molecules* **2023**, *28*, 4208. <https://doi.org/10.3390/molecules28104208>

Academic Editor: Javier Llanos

Received: 18 April 2023

Revised: 15 May 2023

Accepted: 18 May 2023

Published: 20 May 2023




Copyright: © 2023 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Water has a crucial role in the life of all living beings and their survival; therefore, attention to water quality should always be considered. Over recent years, the presence of emerging and persistent pollutants, such as microplastics, antibiotics and pharmaceutical compounds, pesticides and ammonia [1–6], is increased in liquid effluents and groundwater. Physical, chemical, and biological methods can be used to remove these pollutants, but the right treatment choice is very prominent. In recent years, many methods have been employed to treat different wastewater, such as decolorization of colored wastewater using

green nanocomposites, floating treatment wetland (FTW), adsorption, membrane filtration, and solvent extraction [7–11], among others. However, each method has advantages, disadvantages, and limitations regarding efficiency, cost, feasibility, and environmental impact. Although there is currently no reliable and direct answer to the question of which is best, over the past few years, very effective methods have been used to treat wastewater, such as the so-called advanced oxidation processes (AOPs), because of their efficient, cost-effective, environmentally friendly character, and high capability to remove a wide range of pollutants [12]. AOPs include different techniques, such as ozonolysis, sonolysis, photocatalysis, fenton and photo-fenton, and electrochemical oxidation [13]. The common denominator of AOPs is the generation of hydroxyl radicals ($\bullet\text{OH}$), which are very effective in the degradation of highly toxic and persistent pollutants, as they are among the strongest oxidants, with a very high standard oxidation potential $E(\bullet\text{OH}/\text{H}_2\text{O}) = 2.80 \text{ V}_{\text{SHE}}$ [14]. Therefore, the efficiency of advanced oxidation systems is strictly affected by the amount of $\bullet\text{OH}$ generated along the process. Besides $\bullet\text{OH}$, other reactive oxygen species (ROS) can be generated, which can degrade pollutants, including $\text{HO}_2\bullet$, $^1\text{O}_2$, $\text{O}_2^{\bullet-}$, and $\text{SO}_4^{\bullet-}$ [15], as shown in Scheme 1.

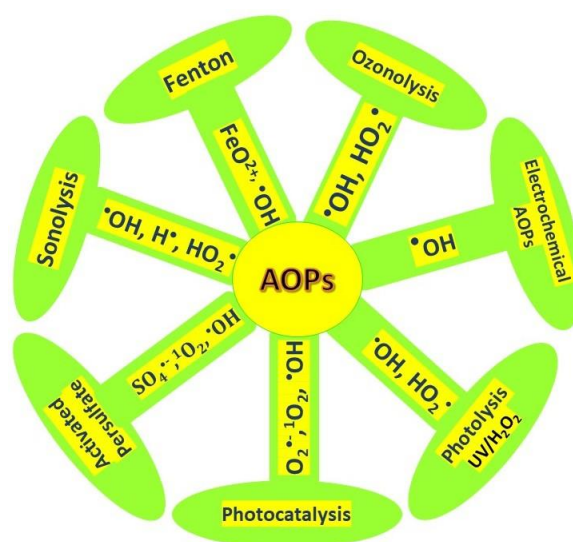

Scheme 1. Different AOPs and the ROS involved (modified from Rayaroth et al., 2022) [15].

In recent years, much attention has been paid to a specific and efficient AOPs technology called electrochemical oxidation (EO), which is widely employed to remove hazardous, recalcitrant, and emerging contaminants [16]. Hence, this review provides an overview of EO and describes a detailed analysis of various aspects of this process. First, the main operating parameters in EO were investigated, including anode materials, current density, composition, and electrolyte concentration. Some parameters that were less considered in previous studies, such as temperature, initial concentration of wastewater, and distance between electrodes, were examined to define the optimal conditions for completely removing contaminants. Moreover, the batch and continuous reactor configurations, the kinetics of electro-oxidation reactions, and cost analysis were discussed. Finally, the review aims to provide a brief introduction regarding the combination method between EO and photocatalysis (PC), called photoelectrocatalysis (PEC). This process proved to be a promising technology, but more studies are required to scale up to industrial-scale applications.

Methodology and Search Strategy

The keywords “electrochemical oxidation”, “emerging pollutants”, “electrochemical oxidation and impact of operational parameters”, “electrochemical oxidation and cost analysis”, “electrochemical advanced oxidation processes”, and “photoelectrocatalysis” were introduced in various databases, including Scopus, Google Scholar and SpringerLink, to

identify a list of peer-reviewed reviews and scientific articles related to removing emerging pollutants from impacted water by means of EO and PEC. The research was carried out mainly by collecting studies from the last 10 years. Anyway, milestone EO studies were referenced due to their undeniable scientific relevance.

2. Electrochemical Oxidation (EO)

Electrochemical oxidation (EO) has recently gained much attention as a very effective method for removing a wide range of pollutants. Efficiency and green performances are the main reasons this technique is very reliable and widely used [17]. EO processes are characterized by two approaches called direct electro-oxidation, or anodic oxidation, and indirect electro-oxidation, as discussed in Section 3. Briefly, in the direct EO process, a direct electron transfer (DET) between the anode surface and contaminants results in pollutants degradation [18]. On the other hand, indirect EO involves the homogeneous reaction of organic pollutants with strong oxidants, such as Cl_2 , H_2O_2 , HClO , ClO^- , SO_4^{2-} , and O_3 , among others, produced during the electrolysis process.

2.1. Study of Electro-Oxidation Operating Parameters

The performances of the EO process are affected by several operational parameters, including initial contaminant concentration, anode materials, supporting electrolyte, electrolyte concentration, current density, and temperature, among others.

2.1.1. Effect of the Anode Material

In recent years, many EO studies have been carried out by means of a variety of anode materials. In the EO processes, since the amount of $\bullet\text{OH}$ produced is dependent on the nature of the anode material, the choice of anode material with high electrocatalytic activity is very important to obtain high oxidation rates [19]. The selected anodic materials must have high oxidation evolution potential and be highly active against organic oxidation, stability in an electrolysis environment, long life, cost-effectiveness, and environmental friendliness. Anodic materials are generally classified into two classes, active or non-active anodes, based on the capability to bond $\bullet\text{OH}$ on their surface. Active anodes establish a strong interaction with $\bullet\text{OH}$, which result only in partial degradation of the target contaminant. Conversely, non-active anodes weakly bond $\bullet\text{OH}$, leading to complete substrate mineralization [20]. Figure 1a shows the standard classifications and properties of typical active and non-active anodes. As shown, the non-active anodes can accumulate more hydroxyl radicals on their surface, making them more efficient in EO treatment of impacted water. Particular non-active anodes, including BDD, PbO_2 , $\text{Ti}_n\text{O}_{2n-1}$, and SnO_2 , own a high oxidation power [20]. Several anodes were employed in different EO studies in recent years, and BDD was the most used material (Figure 1b). The advantages and disadvantages of several common anodes are briefly collected in Table 1.

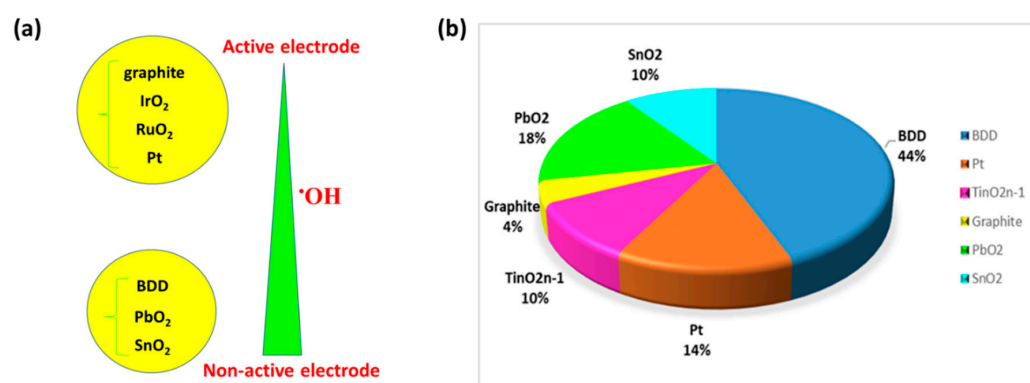


Figure 1. (a) Classification and properties of active and non-active anodes (modified from Yang et al., 2020 [21]); (b) Type of electrode materials employed in different EO studies over the recent years.

Table 1. Advantages and disadvantages of some common anode materials in AOPs.

Electrode (Anode)	Disadvantages	Advantages	Refs.
Magneli-phase titanium suboxides Ti_nO_{2n-1}	Expensive, difficult to manufacture in high volume, the process requires a 2-step process with chemical reduction at $>900\text{ }^{\circ}\text{C}$	High corrosion resistance in acidic and basic solutions, high electrical conductivity, high electrochemical stability, ability to coat numerous substrates with the Ti_4O_7 powders including titanium and the likes, high oxygen evolution rate with high potential	[22]
Boron-doped diamond (BDD)	High cost	High stability, produce large amounts of oxidants, high oxygen evolution rate with high potential, low adsorption, very resistant to corrosion, inert surface	[23]
PbO_2	Toxic effect, lead ions may be released into the test solution and cause problems	High oxygen evolution rate with high potential, availability, low cost, easy manufacturing	[24]
Graphite	Corrosion, especially at high potentials, very low efficiency in electrooxidation	Cheap and easily available	[25]
Pt	High cost, low efficiency in anodic oxidation	High stability, and easily available; no need for additional processes	[26]

2.1.2. Effect of the Supporting Electrolyte and Electrolyte Concentration

As discussed above, the performances of the EO process are influenced by both the supporting electrolyte type used and the initial electrolyte concentration. Various electrolytes are usually employed in EO treatments, such as sodium chloride (NaCl), sodium sulfate (Na_2SO_4), and sodium nitrate ($NaNO_3$), among others. Since, in natural conditions, effluents have low conductivity, the need for a supporting electrolyte is important to increase the conductivity of the system. Therefore, attention to this item plays a very prominent role. Adding an electrolyte may increase the efficiency of EO and the conductivity of the wastewater solution. When specific supporting electrolytes are added to the solution, strong mediator oxidants can be produced that can oxidize pollutants by indirect EO [6]. The different behaviour of electrolytes in the EO process can be attributed to their different performance with the produced oxidizing species due to their different oxidation power [27]. By adding an electrolyte, the electric current flowing through the cell increases because the electrical conductivity increases and the resistance decreases; thus, power consumption can be reduced, which will positively affect the wastewater treatment system (Equation (1)) [28]:

$$P = R \times I^2 = I \times V \quad (1)$$

where R is the resistance (Ohm), V is the voltage (Volt), P is the power consumption (Watt), and I is the electric current (Ampere).

Table 2 shows several works carried out in recent years focused on PFASs (PFOS and PFOA) removal from impacted waters to determine what supporting electrolyte in each article was mostly used.

Table 2. Some supporting electrolytes used to remove emerging contaminants.

Electrode (Anode)	Pollutants	Electrolyte	Removal Efficiency (%)	Refs.
BDD	Linear PFOS	Na_2SO_4 (100 mM)	85.7%	[29]
BDD	Branched PFOS	Na_2SO_4 (100 mM)	84.6%	[29]
BDD	PFOA	Na_2SO_4 (14.2 g/L)	99.5%	[30]
BDD (high boron doping)	PFOA (0.1 mg/L) (water matrix)	Phosphate buffer (100 mM)	95%	[31]
BDD (low boron doping)	PFOS (0.1 mg/L) (water matrix)	Phosphate buffer (100 mM)	84%	[31]
$[(Ti_{1-x}Ce_x)_4O_7]$	PFOS	$NaClO_4$ (0.1 M)	98.9 ± 0.3	[32]
Ti_4O_7	PFOS	$NaClO_4$ (0.1 M)	86.2 ± 2.9	[32]
Ti_4O_7 /amorphous Pd	PFOA	Na_2SO_4 (50 mM)	86.7 ± 6.3	[33]
Ti_4O_7	Linear PFOS	Na_2SO_4 (100 mM)	98.6%	[29]

In several previous EO studies, different electrolytes (Na_2SO_4 , NaBr , NaNO_3 , and NaCl) were tested, keeping the other operating parameters constant, to evaluate the electrolyte composition's effect [34]. As shown in Figure 2a, many studies reported that Na_2SO_4 is the more efficient supporting electrolyte for COD removal. Two different concentrations (5 and 7 g/L) were selected for Na_2SO_4 , which showed that by increasing the concentration from 5 g/L to 7 g/L, the contamination removal increased from 87% to 91% [34]. The effects of NaCl and Na_2SO_4 were investigated under the same initial concentration of COD, phenols, cyanide, and ammonia, and it was observed that NaCl had a better performance than Na_2SO_4 . The percentage of contamination removal for electrolytes NaCl and Na_2SO_4 was 90% and 60%, respectively (Figure 2b). By increasing NaCl concentration, the pollutant removal increased, but from the range of 1.6 to 2.4, this value was almost fixed, highlighting that the best NaCl concentration of 1.6 g/L was identified as the optimum concentration (Figure 2c) [35]. Another study used different electrolytes to remove p-nitrophenol (PNP) using EO by $\text{Ti}/\text{Ti}_4\text{O}_7$ anode. Figure 2d shows the percentage of pollution removal operating in the presence of NaCl , Na_2SO_4 , NaClO_4 , Na_3PO_4 , and NaNO_3 , respectively [36].

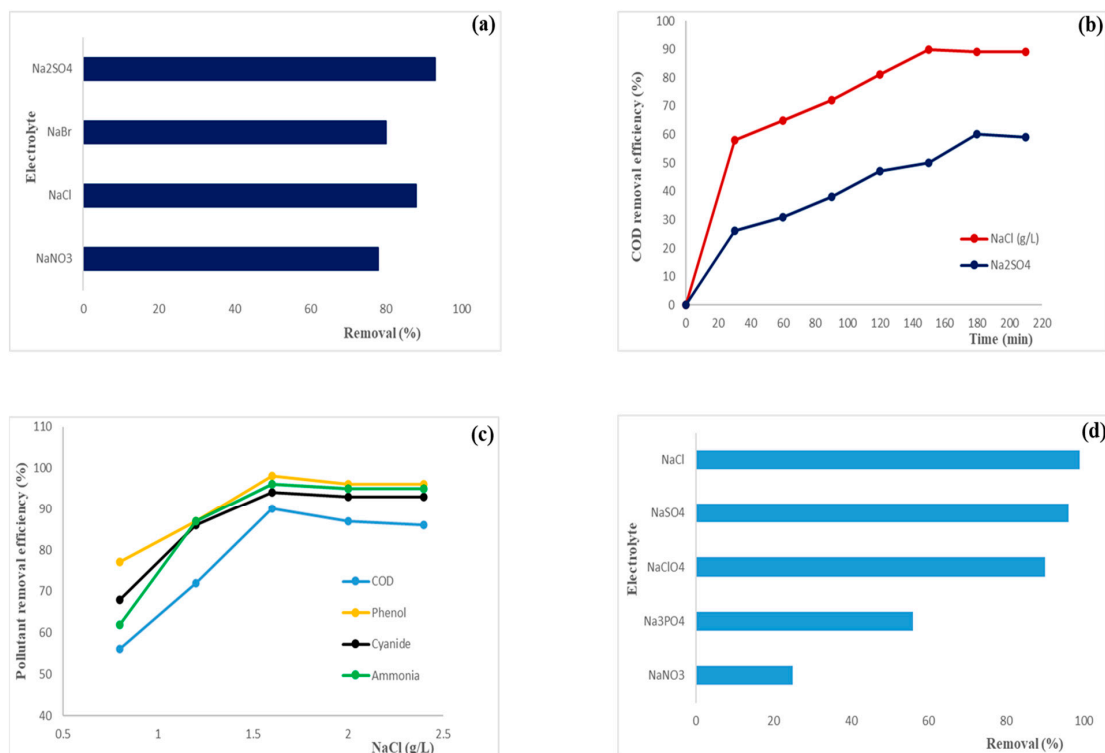


Figure 2. (a) Analysis of the effect of the electrolyte type on the EO process for removing pollutant, modified from Sanni et al. [34]; (b) Comparison of the performance of two electrolytes NaCl and Na_2SO_4 on %COD removal with time, adapted from Ken et al. [35] with modification; (c) Effect of electrolyte concentration on COD removal efficiency, adapted from Ken et al. [35] with modification; (d) Effect of different electrolyte on %PNP removal with time, adapted from Wang et al. [36] with modification.

2.1.3. Effect of the Current Density

Applied current density is another of the main parameters affecting EO processes, because it plays a drastic role in controlling the generation rate of the oxidizing species [37]. Current density is a vector quantity defined as the amount of electric current flowing through a unit cross-sectional area [35]. Current density can be expressed by the following formula (Equation (2)):

$$i = I/A \quad (2)$$

where i is the electric current density (mA/cm^2), I is the electric current flowing through a given material or a conductor (A), and A is the cross-sectional area of a material or a conductor (m^2).

In general, the contaminant degradation efficiency increases in the EO process by increasing the applied current density. It should be noted that an increase in current density increases the cost of EO due to the increase in energy consumption, so finding the optimal point could result in an energy-saving strategy. However, an increase in current density does not always enhance the oxidation rate for increasing the removal efficiency of pollutants due to the occurrence of the oxygen evolution reaction and/or mass transport limitations [38,39]. Therefore, many works have investigated the changes in current density on the efficiency of the EO reaction and finally suggested the optimal current intensity, shown in Table 3.

Table 3. Applied current densities and their optimum values.

Electrode (Anode)	Pollutants	Different (i)	Optimum (i)	Removal Efficiency (%)	Refs.
Magneli-phase titanium suboxides TiO_{2n-1}	PFOS	30, 40, 50, and mA/cm^2	40 mA/cm^2	Over 99%	[12]
BDD	PFOA	25 and 75 mA/cm^2	75 mA/cm^2	79%	[31]
BDD	PFOA	5, 10, and 20 mA/cm^2	10 mA/cm^2	84.1%	[40]
Nano-ZnO coated electrodes	perfluorinated compounds PFCs	5, 10, 15, 20, and 25 mA/cm^2	20 mA/cm^2	66%	[41]
BDD	PFOA	2.5, 6, 12, and 25 mA/cm^2	25 mA/cm^2	more than 90%	[42]
Si/BDD	PFAS	1.8, 20, 27, and 40 mA/cm^2	1.8 mA/cm^2	76–83%	[43]
modified PbO_2	PFOA	10, 20, and 30 mA/cm^2	30 mA/cm^2	91.3%	[44]

In a previous study by Song et al. [45], different current densities (5, 10, and 15 mA/cm^2) were applied to degrade Sulfamethazine at initial COD = 50 mg/L ; it was observed that the removal rate of pollutants increased with increasing current density, and the removal efficiency increased from 68.40% to 94.28% and 99.25%, respectively. In another study by Sanni et al. [34], different current densities of 50, 80, 120, 150, and 230 mA/cm^2 were applied, using BDD as anode and graphite as a cathode in an EO process to remove various contaminants, over a treatment time of 4 h. The highest removal efficiency achieved was about 96% operating at a current density of 230 mA/cm^2 . Anyway, the optimum current density identified was 120 mA/cm^2 , because, acting under these conditions, both excellent removal efficiency and low energy consumption were achieved. On the other hand, power consumption increased from 85 kWh/m^3 to 785 kWh/m^3 as the current density increased from 50 A/cm^2 to 230 A/cm^2 . Figure 3 shows four different current densities of 4, 6, 8, and 10 mA/cm^2 that were tested with $\text{Ti}/\text{Ti}_4\text{O}_7$ as the anode. Increasing the current density from 4 to 6 mA/cm^2 significantly increased both p-nitrophenol removal percentage and PNP removal kinetics from 0.0762 to 0.548 min^{-1} . Then, with increasing the current density from 6 to 10 mA/cm^2 , there were no drastic changes; thus, to prevent further energy consumption, the current density of 6 mA/cm^2 was recognized as the optimal point [36].

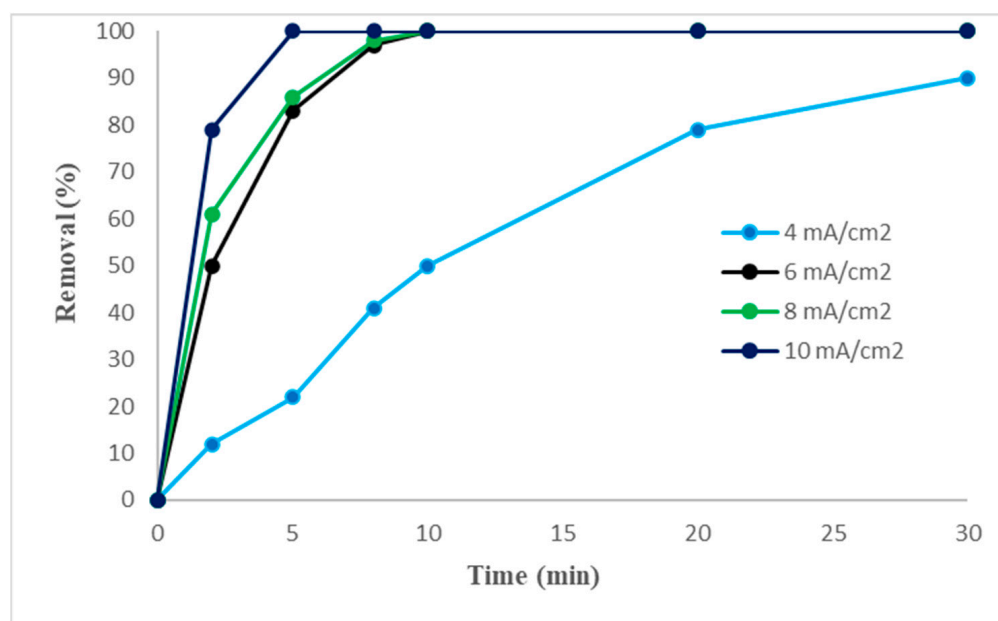


Figure 3. The removal percentage of p-nitrophenol during electrochemical oxidation with different current densities, adapted from Wang et al. [36] with modification.

2.1.4. Effect of the Other Operating Parameters

Although other parameters such as reaction temperature, initial concentration of contaminants, and the effect of distance between electrodes have been less studied, they can certainly affect the removal efficiency of contaminants in EO technology [46]. The temperature can affect the removal efficiency of pollutants, but direct oxidation processes have not much impacted by it. In general, when temperature increases, the efficiency of removing pollutants should increase since it causes a greater mass transport toward the anode because of the decrease of medium viscosity [47,48]. Flox et al. [49] studied the effect of temperature in an EO process to remove the herbicide mecoprop from water. The results showed that by increasing the temperature from 15 °C to 60 °C, the charge rate decreased from 35 A h dm^{−3} to 20 A h dm^{−3}, and the efficiency and removal rate of TOC were performed faster. Conversely, in a previous study [50], an enhancement in temperature resulted in a decrease in the contaminant degradation performances (Figure 4a). In this study, BDD was used as an anode to remove COD, and the current density was equal to 20 mA/cm². EO operations at ambient temperature are generally preferred [51]. The type of water and the initial concentration of wastewater are particularly important in the EO process. In general, water supplies have different organic and mineral substance loads, which affect the percentage of pollution removal. Most experimental studies have focused on ultrapure and pure water [37,52], but these unrealistic systems completely differ from the real conditions. In a Panizza et al. [48] study, the effect of initial COD concentration (0.1–0.3 mM) was investigated, acting with BDD anode at a constant current density of 40 mA/cm², T = 25 °C and a flow rate of 300 dm³/h. In this study, the current efficiency percentage increased by increasing the initial COD concentration. Zhuo et al. [53] examined the effect of the initial perfluorooctanoic sulfonate (PFOS) concentration on the removal efficiency of the EO system. The findings (Figure 4b) displayed that when PFOS concentration increased from 100 mg/L to 300 mg/L, the removal ratios at the anode increased from 61.87% to 82.96%, likely due to the higher chances of PFOS reaching the anode surface. In another study [54], the effects of the initial concentration of PFOA were determined, operating with Ti/SnO₂-Sb/Yb-PbO₂ anode at four different initial PFOA concentrations of 10, 50, 100, and 200 mg/L. The results showed that with increasing initial PFOA concentration, the electrochemical reaction rates increased.

Another important factor influencing the EO process is the distance between the electrodes [55]. By reducing this distance, the removal efficiency of organic matter usually increases. This is because it is one of the important factors in reducing cell resistance, which decreases with decreasing distance between electrodes. In other words, reducing the distance between the electrodes requires less electrical energy to transfer ions, because the cell resistance is low [56,57]. In a previous study [58], five different electrode gap distances (0.003, 0.005, 0.007, 0.009, and 0.011 m) were considered to define the optimal conditions. Keeping the other operating conditions constant, the pollutant removal efficiencies obtained have been 91, 85, 79, 69, and 74%, respectively. As a result, the optimal distance between the electrodes was identified as 0.003 m due to lower energy consumption and higher removal efficiency achieved. In another study by Ma et al. [54], the effect of electrode distance was measured to remove PFOA, and finally, the optimal distance between the electrodes was obtained. The electrode distances range investigated was among 5, 10, 15, and 20 mm, and the degradation ratios of PFOA were $95.11 \pm 3.9\%$, $89.05 \pm 1.1\%$, $85.23 \pm 1.4\%$, and $67.92 \pm 3.8\%$, respectively. As shown in Figure 4c, the optimal distance of 5 mm was selected.

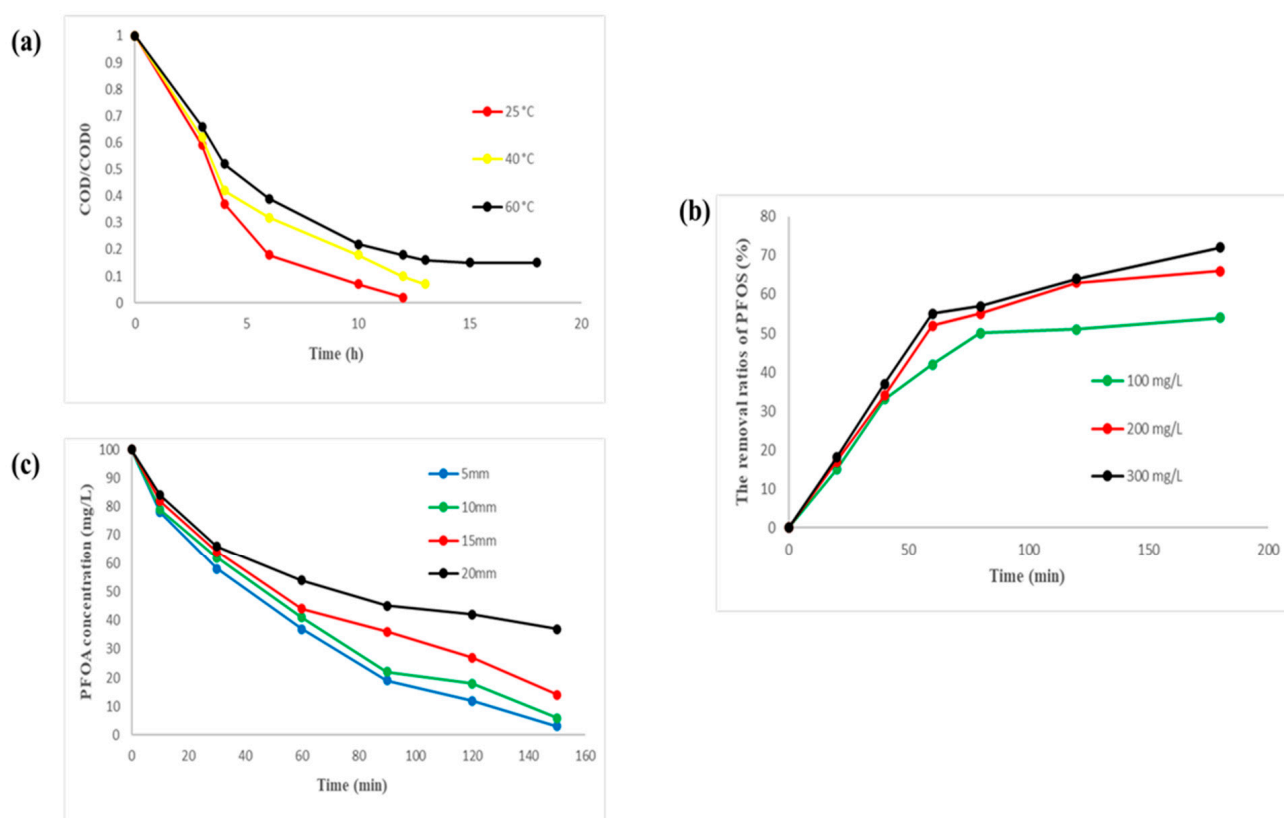



Figure 4. (a) Effect of the temperature on removing COD/COD₀, adapted from Panizza et al. [50] with modification; (b) Effect of the initial PFOS concentration on the decomposition ratios, adapted from Zhuo et al. [53] with modification; (c) Effect of gap distance between two plates and PFOA concentration, adapted from Ma et al. [54] with modification.

2.2. Electrochemical Reactor Design

The design of an electrochemical reactor is one of the significant factors affecting the performance of EO processes for removing emerging pollutants from wastewater [59]. Depending on the type of operation mode, electrochemical reactors can be divided into batch- or continuous-flow reactors. However, several parameters, such as ohmic drop, generation of gas bubbles on the electrodes, and mass transfer, must be carefully considered while designing an EO reactor. Among others, the batch operation mode, using 2D vertical

parallel electrode configuration, is the reactor design more employed in EO processes due to its easiness of installation, handling, and sampling. Several studies report high organic EO degradation efficiencies operating with this design [17,60]. Magro et al. [61] studied the EO process to treat triclosan and its degradation by-products using BDD vertical parallel electrodes in a batch reactor, achieving around 100% degradation efficiency after 240 min. Hao et al. [62] used a conventional single-compartment reactor with vertical parallel plates for degrading phenol from synthetic water. The results indicated 86% of TOC removal after 60 min. The same reactor configuration has been used by Periyasami et al. [63] for the EO removal of florfenicol antibiotic from synthetic water, obtaining 91% of TOC removal after 180 min. Calzadilla et al. [64] studied the anodic oxidation of 30 pharmaceuticals, achieving 90% of mineralization efficiency after 330 min. Although the application of batch mode enables excellent EO performances for degrading organics, several downsides, such as mass transfer limitation, control potential instability, poor current distributions, and complex hydrodynamics, remain. This configuration may lead to massive electrode passivation due to the formation of a gas-bubbling layer, resulting in adverse blockage of the electrode surface [65,66]. Some of these drawbacks may be overcome by employing batch-divided reactors, for example, by means of a membrane to separate the anodic and cathodic compartments [67,68]. This configuration is highly viable and enhances the current efficiency [69], but the space between the electrodes is very large, causing slower reactions [70]. Anyway, an undivided batch reactor, where both cathode and anode are in the same vessel, is still the most studied configuration, with its simple design and ease of scale-up to an industrial scale [71]. To summarize, the batch operation mode is a promising reactor configuration to be adopted for EO organic pollutants removal from water. However, some limitations are associated with slow mass and charge transfer, small wastewater volume to treat (lower than 1 L), and low potential for large-scale application [72].

For this proposal, continuous-flow reactors are better for treating large volumes of polluted wastewater and operate under more realistic conditions. Continuous-flow reactors enhance faradaic efficiency, causing lower energy consumption and lower electrolyte loads [70,73]. Moreover, using continuous-flow reactors on the laboratory scale permits an easier process scaling up [74]. In general, continuous-flow reactors can be divided into two main configurations, namely, flow-by and flow-through modes [75]. In the flow-by configuration, the electrodes are positioned in parallel to the flow direction, while in the flow-through, they are placed horizontally [76]. Operating EO in the flow-by or flow-through mode significantly impacts the mass transfer of several organic compounds [18]. However, several previous studies have reported that electrochemical flow-through reactors exhibited higher removal efficiencies of contaminants and lower energy consumptions than flow-by reactors due to the higher mass transfer efficiency; this configuration improved bulk solution reactions by means of reactive oxygen species [77,78]. Zicheng et al. [79] compared the two configurations for ammonium and COD removal from impacted marine aquaculture. Again, the flow-through configuration showed the best performance, showing a higher formation rate of free chlorine and, thus, the removal rate of contaminants. Scheme 2 shows some of the main reactor configurations used in previous EO investigations.

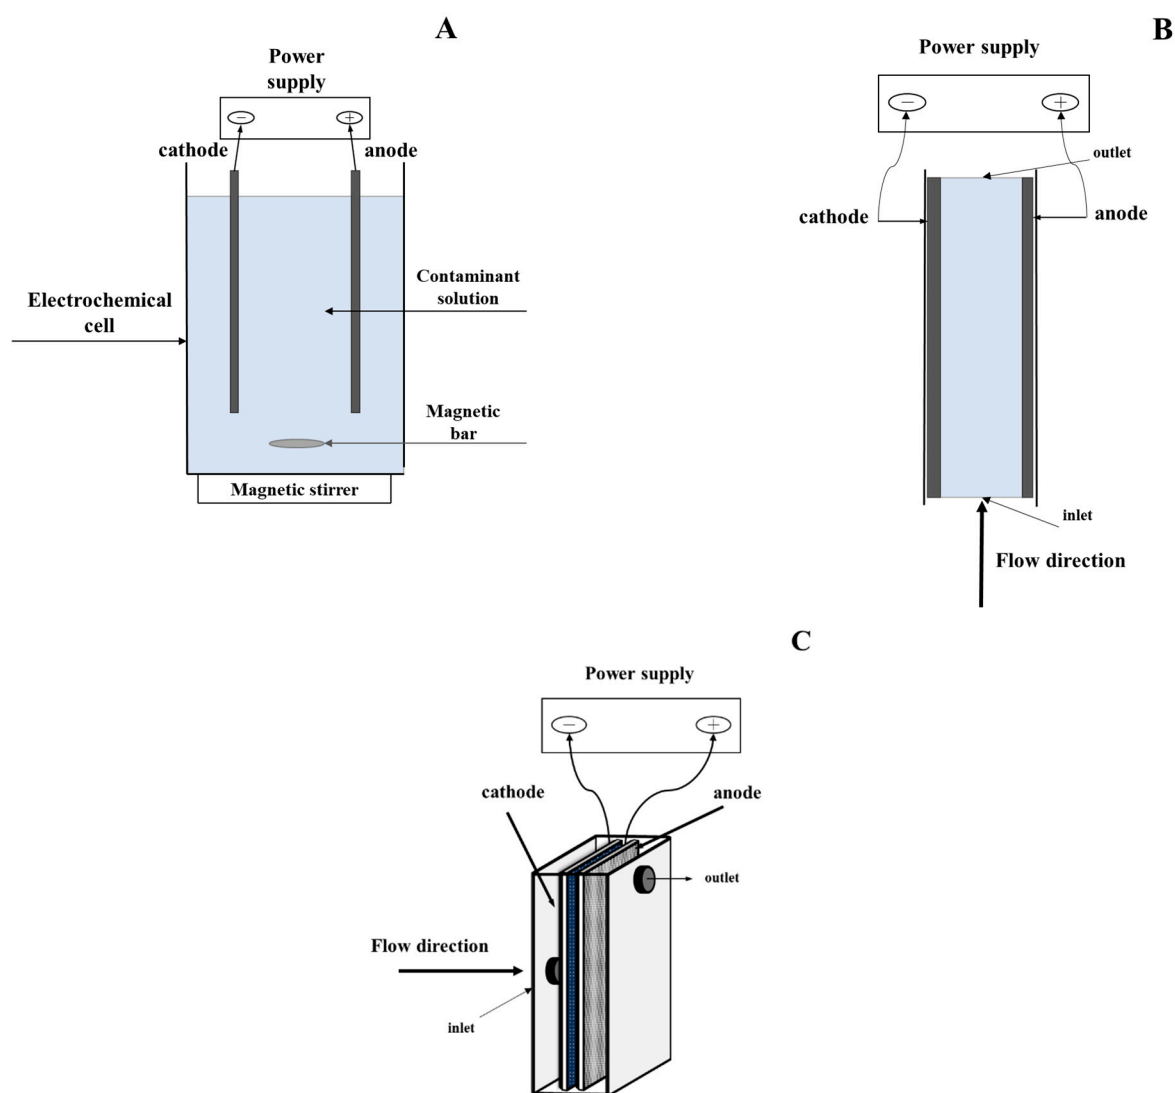




Scheme 2. Electrochemical configurations: (A) Batch mode; (B) Flow-by mode; (C) Flow-through mode.

3. Mechanism of Electrochemical Oxidation of Organic Pollutants

As introduced above, the EO process may occur by two mechanisms: direct EO, where organics pollutants are oxidized by transferring electrons after adsorption on the anode surface, without the implication of any chemical substances; indirect EO, where strong oxidants (i.e., chlorine, hypochlorite, persulphate ion, or hydrogen peroxide) are formed on the anode surface and propagated in the bulk solution, resulting in the organic degradation of molecules [12].


3.1. Direct EO

Direct EO mechanism only involves the contribution of electrons, which oxidize the contaminants molecules, resulting in direct charge-transfer reactions [19]. The first step is the adsorption of the pollutants onto the anode surface. The process is mainly controlled by the molecules transport and electron transfer rate at the anode/solution interface [80]:




where R is the pollutant molecule, and M is referred to as the anode surface.

The mechanism is facilitated by acting at low applied anode potential to avoid the oxygen evolution reaction (OER) that occurs at 1.23 V_{SHE}. However, under conditions of low and fixed anode potential, it is likely to encounter the poisoning effect, resulting in the formation of a polymer layer on the anode surface and decreasing the electro-catalytic activity. The poisoning effect depends on the nature of the anode surface and both concentration and properties of the organic pollutants. Performing EO in the potential region of water discharge (anode potential > 2.3 V_{SHE}) could be a manner to avoid anode fouling. OTR at high anodic potential involves a first step in which the production of adsorbed hydroxyl radicals from water discharge occurs:




MO_x represents general oxide anode surface sites for the adsorption of •OH. The adsorbed [•OH] (also called physisorbed “active oxygen”) may interact with the oxygen already present in the oxide anode, resulting in a possible transfer of oxygen from [•OH] to the lattice of the anode and generating the so-called higher oxide MO_{x+1} (also called chemisorbed “active oxygen”) [20]:



The reaction reported in Equation (5) is strongly affected by anode materials [12]. Several anodes encourage partial and selective oxidation of pollutants (conversion), while others favour complete oxidation to CO₂ (mineralization). Therefore, as discussed earlier, it is possible to discern between two limiting classes of electrodes, defined as “active” and “non-active” anodes [19]. Active anodes, with low oxygen evolution potential (OEP), enable the generation of chemisorbed active oxygen MO_{x+1}, favouring the conversion or selective oxidation of organics:



Conversely, non-active anodes with high OEP avoid the reaction in Equation (5) and favour the mineralization to CO₂ [20]:



Several active and non-active anodes are anew listed in Table 4.


Table 4. OEP of the main active and non-active anodes.

	Material	OEP (V _{SHE})
Active anodes	graphite	1.7
	IrO ₂	1.5
	RuO ₂	1.5
	Pt	1.6
Non-Active anodes	BDD	2.3
	PbO ₂	1.9
	SnO ₂	1.9


3.2. Indirect EO

Indirect EO leverages the intermediation of some strong oxidant reagents, electrochemically generated on the anode surface, which act as electron carriers between the anode and the organic contaminant in the bulk phase. While direct EO has some advantages, such as no need for additional chemicals, indirect EO is more efficient in preventing electrode passivation and enhancing the electro-catalytic activity. The generation of oxidizing intermediate species accounts for a pivot role for indirect EO. To optimize this step, the potential

at which the intermediates are generated must be quite far from the OEP; moreover, the rate for the intermediate generation must be higher than the rate of other side reactions, and then the contaminants molecules in the bulk phase must not be adsorbed on the anode surface, interfering with the direct EO pathway [81]. Typical oxidizing species are hydrogen peroxide, peroxydisulfate and sulfate radicals, ozone, and percarbonate [82]. Among others, active chlorine is the most traditional anodically oxidizing species employed for indirect EO of pollutants. Naturally occurring or added chloride available in solution may trigger some reactions to form electroactive chlorine species, such as chlorine gas, hypochlorous acid, or hypochlorite ion [83]:




The rate of the reaction shown in Equation (9) is generally lower operating in acidic media due to OH^- instability and significantly higher in basic solution due to the fast formation of OCl^- (pK_a 7.44) ion, as reported in Equation (10), implying that the basic or neutral pH conditions are more desirable for degrading organic pollutants involving chlorine. When OCl^- is generated in the bulk phase, it takes action as the main oxidizing chlorine-mediator agent in the degradation of pollutants:



Equations (8)–(11) provide a cycle in which different electroactive chlorine species are formed [84]. These species were used to remove a wide range of organic contaminants from impacted water, showing high degradation efficiencies. In a recent study, Salvestrini et al. [17] worked on EO of humic acids operating with NaCl (10 mM), among others salt. The results showed that the presence of Cl^- allows the achievement of the highest humic acid degradation efficiency. The experiments were conducted at pH 10, entailing that ClO^- dominated over the other species and was probably the main driver of pollutant degradation.

In general, it has been shown that operating at 25 °C, Cl_2 hydrolysis (Equation (9)) is complete at a pH higher than 4, and HOCl and OCl^- are the main available active chlorine species in solution in the pH range between 6 and 9. Hypochlorous acid and hypochlorite ions own a high oxidizing power due to the ClO^- bond polarization. Consequently, the reactions of HClO/ClO^- with organics may be depicted as oxidation, addition, or electrophilic reactions [85]. Anyway, albeit the use of active chlorine species in indirect EO processes enhances the general performances of the treatment, several problems exist, such as the possible formation of chlorinated organic intermediates or the low amount of chloride in the real water bodies. This involves that indirect EO needs the addition of salt to increase the process efficiency.

As reported above, peroxydisulfate ($\text{S}_2\text{O}_8^{2-}$) and sulfate radicals ($\text{SO}_4^{\cdot-}$) are also employed in indirect EO processes to degrade organics. Unlike chlorides, sulfates are not considered to be pollutants; hence, their use is desirable. $\text{S}_2\text{O}_8^{2-}$ can be electrochemically generated from the oxidation of SO_4^{2-} at an applied potential higher than $2 V_{\text{SHE}}$:



As is well known, the reactions of $\text{S}_2\text{O}_8^{2-}$ with organics at room temperature are not effective; thus, peroxydisulfate must be activated. Several methods are employed to activate $\text{S}_2\text{O}_8^{2-}$, such as metal reactions or energy-based processes (heat, UV). Sulfate radicals have unique features, such as the ability to be a strong electron acceptor, enabling them to degrade persistent organic compounds successfully. Cai et al. [86] have applied an indirect electrochemical oxidation process to degrade the 2,4-dichlorophenoxyacetic acid

from water using electrochemically generated persulfate. The results showed the feasibility of the approach. Tian et al. [87] successfully removed phenol from impacted water by persulfate-mediated electrooxidation. Yet, in a recent effort, Song et al. [88] scrutinized the electrochemical oxidation of organics in sulfate solutions. The presence of peroxydisulfate enhanced the process efficiency. The degradation rates of the organics were approximately doubled in the electrochemical activation of the peroxydisulfate process with respect to the experiments conducted in the absence of $S_2O_8^{2-}$.

To summarize, indirect EO implementation for degrading organic pollutants in impacted water may overcome several problems widely encountered in direct oxidation, such as anode surface fouling, mass transfer limitations, and higher energetic costs. However, specific studies are needed to seek the most suitable operating conditions, thus limiting several concerns such as the formation of undesired toxic by-products during the treatment [85].

3.3. EO Degradation Kinetics

The kinetics of the reactions provides information on the mechanism and the efficiency of the degradation process [89]. The order of the kinetics and the degradation rates depend on the configuration system and the operative parameters applied over the treatment. Several factors, such as the initial concentration of organic compounds, the concentration of the electrolyte, the applied current density, the pH of the solution, and the type of anode material, among others, may impact the degradation kinetics of pollutants [90]. These parameters strongly affect the generation of hydroxyl radicals, the mass transfer rate of pollutants, the availability of active sites, and, subsequently, the overall oxidation efficiency of the process [19]. By way of illustration, the degradation rate usually decreases with increasing the concentration of pollutants, because a greater quantity of organic molecules is forced to react with the same amount of oxidant species, resulting in an overall reduction of the oxidation rate [91]. Yet, the degradation rate typically increases significantly with increasing in the applied current density [92].

Generally, two different degradation kinetic models are adopted to describe the EO of organic pollutants in water: pseudo-zero-order kinetic (Equation (14)) and pseudo-first-order kinetic (Equation (15)). With the pseudo-zero-order kinetic, the process is considered under current control since the electron transfer process is hampered on the anode surface, resulting in current limitation conditions. Therefore, the rate of oxidation at the anode results slower than the rate of arrival of contaminant molecules:

$$\frac{d[C]}{dt} = -k_{0,app} \quad (14)$$

where C and $k_{0,app}$ are the contaminant concentration and the pseudo-zero-order kinetic constant, respectively. With the pseudo-first-order kinetic, the process is under mass transfer control since the rate of the oxidation is limited by the rate of diffusion of organic molecules to the anode surface (high current and low contaminant concentration) [93,94]:

$$\frac{d[C]}{dt} = -k'_{obs}[C]^m[OH]^n \quad (15)$$

where C and $\bullet OH$ are the contaminant and $\bullet OH$ concentrations, m and n are the orders of the reaction with respect to the concentrations of C and $\bullet OH$, respectively, and k'_{obs} represents the apparent kinetic rate constant. As is well known, pseudo-first-order model assumes a quasi-stationary state for $\bullet OH$ radicals on the anode surface since they are very reactive and unable to be accumulated in the aqueous phase. This entails that a constant concentration of $\bullet OH$ always reacts with the contaminant (the reactant is considered in excess) on the anode surface during the full treatment time [95,96]. Based on the above considerations, Equation (15) can be rewritten as:

$$-\frac{d[C]}{dt} = k'_{app}[C]^m \quad (16)$$

where $k'_{app} = k'_{obs}[OH^\bullet]^n$, and k'_{app} is the pseudo-first-order kinetic constant [97].

Most studies reported that the EO of organic pollutants exhibits pseudo-first-order kinetics, thus with the rate limited by mass transfer of the substrate from the bulk solution to the anode surface. Hai et al. [98] have studied the EO of sulfamethoxazole (SMX) using BDD anode. The results showed that the degradation of SMX followed pseudo-first-order reaction kinetics, and the reaction rates enhanced with the rising of the applied current density, with a maximum of 0.062 min^{-1} at 45 mA/cm^2 . Olver-Vargas et al. [99] investigated the EO of the dye azure B in an aqueous solution using BDD anode. The degradation of azure B obeyed pseudo-first-order reaction kinetics (k_{app} of 0.37 min^{-1} after 500 min of treatment), suggesting that a constant amount of $^\bullet OH$ reacts with the substrate at a given applied current density. Yet, Otzturk et al. [97] examined the EO of paracetamol (PCT) using Pt anode. Even in this study, the PCT degradation rate was well described by pseudo-first-order kinetic. The value of k_{obs} increased linearly with increasing the applied current intensity from 0.02 to 2 A, proving a first-order dependence of the reaction on $^\bullet OH$. Brillas et al. [100] reported a study on the electrochemical incineration of Diclofenac (DCF) in aqueous media using Pt and BDD anodes. In both cases, the DCF decay followed a pseudo-first-order kinetic reaction, and the degradation rate was influenced by the type of anode material used during the treatment. The results displayed rate constants of $5.4 \times 10^{-5} \text{ s}^{-1}$ and $2.2 \times 10^{-4} \text{ s}^{-1}$, operating with Pt and BDD anode, respectively. For the record, some researchers have reported that the EO of organics might also follow a mixed first- and zero-order kinetics, in which the oxidation process is affected by both current and mass transfer limitations [93,94].

4. Cost Analysis and Energy Consumption

In EO of organic contaminants, the removal efficiency of pollutants is usually estimated to evaluate the process viability. However, a meaningful subject in an EO process is the total operational cost required to treat the contaminants [101]. Total operating costs are usually related to electrical energy consumed, electrode supply and replacement, labor wages, pumping, stirring, cleaning, and maintenance procedures. As is well known, EO is considered an energy-consuming process; thus, the electric energy contribution is the more significant parameter to consider for estimating total operational costs. Moreover, electrode supply is a considerable capital cost driver in an EO process [12].

Electric energy requirement may be calculated in two different ways, depending on the organic concentration in the solution. The electric energy per mass (E_{EM}) is used when the concentration of pollutants in the bulk phase is high [102]. Under this condition, the rate of degradation of organics can be considered a zero-order, because the removal of contaminants is directly dependent on the rate of electric energy applied. E_{EM} represents the electric energy in kilowatt-hours [kWh] essential to achieving the degradation of a unit mass of a contaminant in polluted water. If the EO process is performed in batch mode, E_{EM} is estimated by the following equation [102]:

$$E_{EM} = \frac{Pt1000}{VM(C_i - C_f)} \quad (17)$$

where P is the applied power (kW), V is the volume (L) of water treated, t is the time (h), M is the molar mass (g/mol) of the contaminant, and c_i and c_f are the contaminant concentrations at initial and final treatment time (mg/L), respectively.

If the EO process is performed in flow-through mode, E_{EM} is calculated through the following equation [102]:

$$E_{EM} = \frac{Pt1000}{FM(C_i - C_f)} \quad (18)$$

where F is the water flow rate ($\text{m}^3 \text{h}^{-1}$).

When the concentration of contaminant in the solution is low, it is recommended to use the electric energy per order (E_{EO}). In this case, the degradation rate of pollutants can be considered a first-order, because the removal of contaminants depends on the rate of the electric energy provided to the system [102]. E_{EO} is the electric energy per time (kWh) required to remove a contaminant by one order of magnitude in a unit of volume (m^3) of impacted water [12,102]. In batch mode, the following equation can be used [102]:

$$E_{EO} = \frac{Pt1000}{Vlg(C_i - C_f)} \quad (19)$$

where $lg(C_i - C_f)$ is the logarithm of the difference of the concentrations.

In flow-through mode [102]:

$$E_{EO} = \frac{P}{Flg(C_i - C_f)} \quad (20)$$

The electrode cost contribution to the total operational costs in the EO process is usually estimated by the so-called anode surface area (ASA_O) of the contaminant removed from the impacted water. ASA_O is calculated by the following equation [103]:

$$ASA_O = \frac{At}{Vlg(C_i - C_f)} \quad (21)$$

where A is the apparent anode area (m^2).

Table 5 lists operational cost assessments carried out by several authors. The total operating cost of the EO process mainly entails the cost of electrical energy and the cost of electrode required to treat 1 m^3 of wastewater by EO at optimum operative conditions.

Table 5. Total operating cost for different types of pollutants treated in EO.

Type of Pollutants Treated	Electrical Energy Consumed (kWh m^{-3})	Cost of Electrical Energy (€ m^{-3})	Cost of Electrodes (€ m^{-3})	Total Operating Cost (€ m^{-3})	Refs.
<i>p</i> -nitrophenol	96	6.7	220	226.7	[104]
Eriochrome Black T	/	/	/	52	[105]
Textile effluent	5.6	0.56	/	0.56	[106]
Pyridine	/	0.038	/	248	[107]
Butirric acid	/	/	/	12	[104]
Pharmaceuticals wastewater	0.542	0.033	1.99	2.02	[108]
Textile effluent	43.82	7.22	/	7.22	[109]
Textyle dyehouse	1.93	0.13	/	0.13	[110]
PFOS	4.0	0.45	/	0.45	[12]

However, it should be noted that the total operating costs are highly dependent on the treatment method, type, and initial concentration of the contaminant. Yet, the operation costs decrease by increasing the scale of the EO process acting in continuous configurations with respect to batch configurations [104].

5. Combination of EO with Photocatalysis


Although EO technology alone is effective, combining several AOPs techniques can further improve the removal of contaminants from wastewater and save energy [111,112].

For example, EO treatment of large volumes and amounts of water requires high energy consumption; hence, using technologies that need less energy is desirable. Numerous studies have been performed on combining EO with other AOPs techniques, which are called electrochemical advanced oxidation processes (EAOPs). Recently, several EAOPs have been employed for the treatment of impacted wastewater, such as electrocoagulation (EC), electro-Fenton (EF), photoelectro-Fenton (PEF), solar photoelectro-Fenton (SPEF), anodic oxidation with electrogenerated H_2O_2 (AO- H_2O_2), electrochemically activated persulfate processes, and photoelectrocatalysis (PEC), among others [113–115]. Although these techniques have shown technical feasibility to degrade recalcitrant contaminants, each exhibits several drawbacks. EC involves a high sacrificial anode replacement rate and maintenance needs [116]. Fenton-based EAOPs need to operate in acidic conditions, also involving a final step to remove the catalyst from the treated solution up to the legal limits [113]. AO- H_2O_2 requires a high amount of H_2O_2 , which must be met to achieve reasonable degradation efficiencies. Moreover, during electrochemically activated persulfate processes, radical sulphate must be activated by energy-based or electro-transfer-based methods, which may significantly impact the overall costs of the treatment [117].

Over recent years, PEC processes have gained more attention for degrading contaminants from aqueous media [118]. PEC can be an excellent solution to avoid the restrictions of solid–liquid separation, recycling of catalysts, and high energy consumption. Photocatalysis can help EO in the production of $\bullet\text{OH}$, thereby increasing the removal efficiency of the system [119]. PEC can overcome the recombination rate of photogenerated electron-hole pairs, which constitutes one of the main limitations of simple photocatalysis processes [120]. Moreover, the possible involvement of natural light during the treatment makes it an environmentally friendly technique.

Photoelectrocatalysis (PEC)

PEC is an AOPs considered environmentally friendly and highly efficient for degrading organic and persistent pollutants from wastewater. PEC consists of applying an external potential to a semiconductor film as a photocatalyst placed over a conductive substrate to avoid the recombination of photogenerated electron-hole (e^-/h^+) pairs. Thereby, the process increases h^+ and the formation of hydroxyl radicals [121,122]. Oxidative–reductive reactions occurring during photocatalysis are shown in the following equations. They are divided into four steps, including excitation (Equation (22)), recombination, e^- scavenging (Equations (23) and (24)), and oxidation of hydroxyls (Equation (25)). The mechanism of photocatalysis consists of the initial photoenergy ($h\nu$) that excites a single electron to an empty electron band or the empty conduction band, leaving behind a positive hole (h^+) [123,124]:



In the above equations, species such as $\bullet\text{OH}$ and $\text{O}_2^{\bullet-}$ can react with contaminants and, as shown in Equations (26) and (27), can be responsible for removing contaminants from wastewater [125]:



The photoelectrocatalytic process combines electrochemical and photocatalytic processes. This means that electrochemical degradation and heterogeneous photocatalytic degradation are used simultaneously for the degradation of organic pollutants in wastewater.

ter, increasing the removal efficiency of pollutants due to the higher production of different radicals [126]. The photocatalyst mechanism is based on light energy (UV and solar/visible light). UV irradiation is more common than solar and visible light due to the large bandgap of the semiconductors [127]. When light (UV and solar/visible) is emitted to semiconductor catalysts and shines, it excites and activates them, eventually forming energy-rich electron-hole pairs. However, semiconductor catalysts should have suitable properties to increase efficiencies, such as the ability to absorb much light, low cost and high availability, and very good stability. To increase the efficiency of pollutant removal in the PEC process, operative conditions for both electrochemical and photocatalytic sections, such as pH, supporting electrolyte and concentration, light source, light intensity, photoelectrode type, and the thickness of semiconductor film, and the design of the photoelectrochemical reactor have to be optimized [128]. PEC is a reliable and well-known technique widely used since it has advantages such as low cost, high stability, green nature, non-toxicity, effective, and products with low pollutant load [129]. Table 6 shows a collection of recent articles focused on the PEC application for removing contaminants from wastewater.

Table 6. PEC applications to remove emerging contaminants.

Semiconductor Materials Applied as Photoanode	Supporting Electrolyte	Light Source	Contaminant	Degradation Efficiency (%) and/or (Process Time (h))	Refs.
Thin layer of the TiO ₂ slurry onto the surface of two PVC plates (16 cm × 6 cm)	[NaCl] = 0.3 g/L	power of UV lamp was 8 W	for 40% phenol removal and TOC ₀ = 38.3 mg/L	~0.35 (h)	[130]
TiO ₂ NTs/Ti	0.02 M Na ₂ SO ₄	14 UV lamp (275 nm)	Acetaminophen, 10 mg/L	Act > 95%, (5 h)	[131]
TiO ₂ NTs/Ti	pH = 3	11 W Hg lamp (254 nm)	Real textile wastewater COD, 108 mg/L	COD—74.1%, (4 h)	[132]
TiO ₂ /FTO Nanorods	0.1 M NaCl,	300 W Xe lamp (AM 1.5 G filter)	U(VI), 0.5 mM	>99% (12 h)	[133]
WO ₃ /Ti Nanosheets	0.1 M H ₂ SO ₄	1000 W Xe lamp (360 nm),	Atrazine 20 mg/L	Atr—100% (3 h), TOC—72% (22 h)	[134]
TiO ₂ /FTO NPs Nano porous	0.02 M Na ₂ SO ₄	4 W UV lamp (254 nm)	Tetracycline, 10 mg/L	80% (3 h)	[135]
MoS ₂ /ITO Nanosheets	0.1 M Na ₂ SO ₃	300 W Xe lamp (>420 nm)	Ammonia nitrogen, 20 mg/L Bovine Serum Albumin, 10 mg/L	AN—80% (6 h) BSA—70% (4 h)	[136]
TiO ₂ NTs/Sb-SNO ₂ /Ti	—————	UV light (365 nm)	Textile industrial wastewater (TWW-COD = 237 mg/L), Wastewater (CWW-COD = 686 mg/L)	TWW-COD—58%, CWW-COD—54% (5 h)	[137]
N-C-TNTAs/Ti	pH = 4	100 W Hg lamp	Perfluorooctanoic acid, 40 mg/L	56.1% (3 h)	[138]
N-CDs/Cu NRs	0.05 M Na ₂ SO ₄	Hg lamp (250 W)	Cotton pulp black liquor	94.33% (1 h)	[139]

6. Conclusions and Future Perspectives

This paper provided an overview of the EO process employed as an innovative method for removing emerging pollutants from water and wastewater. By reviewing a number of articles from recent years, the crucial role of several operational parameters has been critically examined. One of the advantages of further understanding the impact

of these operational parameters on EO processes is reducing energy consumption and increasing the removal efficiency of pollutants. Finally, another important AOPs technique, called photoelectrocatalysis (PEC), widely used for degrading emerging pollutants, has been reviewed.

This critical review revealed that the EO of emerging pollutants is rapidly progressing along its evolutionary path. However, there are still many deficiencies around it that need to be solved. A detailed study of the operating conditions is very critical, because a better understanding of the operating conditions will help to increase the efficiency of the process. The choice of appropriate anode material, having a high life cycle and efficiency, will play a significant role in the degradation of organic pollutants. Again, it is essential to pay attention to other operating parameters of electrochemical systems, such as the applied current intensity, the type and concentration of supporting electrolytes, the distance between the electrodes, the temperature, etc. Therefore, finding the best optimal points of operating conditions will be one of the main challenges of chemical EO of emerging pollutants. As a result of this overview, it is worth noting that one of the most important factors affecting the EO of chemicals is the configuration and the scale of the reactor selected. So far, many works have been performed with reactors on a laboratory scale, but it is very necessary to pay attention to the design of reactors on an industrial and large scale. Furthermore, electricity consumption and the cost of anode materials constitute the main factors affecting the economic feasibility of the EO process. Thus, identifying the best operating conditions can lead to a more cost-effective and efficient EO treatment.

Coupling both EO and photocatalysis allows for obtaining a combined PEC process capable of better treating pollutants in a more environmentally friendly way. However, the scarcity of such investigations over the recent years about PEC in real wastewater enhanced the need to deepen the application of this technology. Based on the results of this article, the future investigations of the researchers should be devoted to identifying the best operative condition, in terms of reactor design, for the process scaling-up, so shifting from lab-scale treatments to industrial processes capable of providing decentralized water treatment of urban and domestic wastewater. The next step of this technology should be to treat real wastewater containing several emerging pollutants at very low concentrations, thereby simulating actual environmental conditions. In the near future, the implementation of renewable energies will be pivotal to performing more sustainable PEC processes.

Author Contributions: Conceptualization, P.I.; methodology, A.F. and S.C.; writing—original draft preparation, M.S.N., A.F. and S.C.; writing—review and editing, P.I. and D.M.; supervision, D.M. All authors have read and agreed to the published version of the manuscript.

Funding: This work was supported by the Campania Region, Regional Law 29 June 2021, No. 5—DRD No. 410/2021, action B, under Project “RiduciN” and the VALERE “Vanvitelli per la Ricerca” program funded by the University of Campania “Luigi Vanvitelli”.

Institutional Review Board Statement: Not applicable.

Informed Consent Statement: Not applicable.

Data Availability Statement: No new data were created or analyzed in this study. Data sharing is not applicable to this article.

Conflicts of Interest: The authors declare that there is no conflict of interest with this work.

Sample Availability: Samples of the compounds are not available from the authors.

References

1. Iovino, P.; Fenti, A.; Galoppo, S.; Najafinejad, M.S.; Chianese, S.; Musmarra, D. Electrochemical Removal of Nitrogen Compounds from a Simulated Saline Wastewater. *Molecules* **2023**, *28*, 1306. [[CrossRef](#)] [[PubMed](#)]
2. Morin-Crini, N.; Lichtfouse, E.; Liu, G.; Balaram, V.; Ribeiro, A.R.L.; Lu, Z.; Stock, F.; Carmona, E.; Teixeira, M.R.; Picos-Corrales, L.A.; et al. Worldwide Cases of Water Pollution by Emerging Contaminants: A Review. *Environ. Chem. Lett.* **2022**, *20*, 2311–2338. [[CrossRef](#)]

3. Sandoval, M.A.; Vidal, J.; Calzadilla, W.; Salazar, R. Solar (Electrochemical) Advanced Oxidation Processes as Efficient Treatments for Degradation of Pesticides. *Curr. Opin. Electrochem.* **2022**, *36*, 101125. [\[CrossRef\]](#)
4. Okoffo, E.D.; Rauert, C.; Thomas, K.V. Mass Quantification of Microplastic at Wastewater Treatment Plants by Pyrolysis-Gas Chromatography–Mass Spectrometry. *Sci. Total Environ.* **2023**, *856*, 159251. [\[CrossRef\]](#) [\[PubMed\]](#)
5. Chianese, S.; Fenti, A.; Iovino, P.; Musmarra, D.; Salvestrini, S. Sorption of Organic Pollutants by Humic Acids: A Review. *Molecules* **2020**, *25*, 918. [\[CrossRef\]](#) [\[PubMed\]](#)
6. Soares, B.S.; de Mello, R.; Motheo, A.J. Groundwater Treatment and Disinfection by Electrochemical Advanced Oxidation Process: Influence of the Supporting Electrolyte and the Nature of the Contaminant. *Appl. Res.* **2023**, e202300008. [\[CrossRef\]](#)
7. Salvestrini, S.; Fenti, A.; Chianese, S.; Iovino, P.; Musmarra, D. Diclofenac Sorption from Synthetic Water: Kinetic and Thermodynamic Analysis. *J. Environ. Chem. Eng.* **2020**, *8*, 104105. [\[CrossRef\]](#)
8. Saleem, H.; Arslan, M.; Rehman, K.; Tahseen, R.; Afzal, M. Phragmites Australis—A Helophytic Grass—Can Establish Successful Partnership with Phenol-Degrading Bacteria in a Floating Treatment Wetland. *Saudi J. Biol. Sci.* **2019**, *26*, 1179–1186. [\[CrossRef\]](#)
9. George, A.; Dhayal Raj, A.; Albert Irudayaraj, A.; Josephine, R.L.; Venci, X.; John Sundaram, S.; Rajakrishnan, R.; Kuppusamy, P.; Kaviyarasu, K. Regeneration Study of MB in Recycling Runs over Nickel Vanadium Oxide by Solvent Extraction for Photocatalytic Performance for Wastewater Treatments. *Environ. Res.* **2022**, *211*, 112970. [\[CrossRef\]](#)
10. Najafinejad, M.S.; Mohammadi, P.; Mehdi Afsahi, M.; Sheibani, H. Biosynthesis of Au Nanoparticles Supported on Fe₃O₄@polyaniline as a Heterogeneous and Reusable Magnetic Nanocatalyst for Reduction of the Azo Dyes at Ambient Temperature. *Mater. Sci. Eng. C* **2019**, *98*, 19–29. [\[CrossRef\]](#)
11. Najafinejad, M.S.; Mohammadi, P.; Mehdi Afsahi, M.; Sheibani, H. Green Synthesis of the Fe₃O₄@polythiophen-Ag Magnetic Nanocatalyst Using Grapefruit Peel Extract: Application of the Catalyst for Reduction of Organic Dyes in Water. *J. Mol. Liq.* **2018**, *262*, 248–254. [\[CrossRef\]](#)
12. Fenti, A.; Jin, Y.; Rhoades, A.J.H.; Dooley, G.P.; Iovino, P.; Salvestrini, S.; Musmarra, D.; Mahendra, S.; Peaslee, G.F.; Blotevogel, J. Performance Testing of Mesh Anodes for in Situ Electrochemical Oxidation of PFAS. *Chem. Eng. J. Adv.* **2022**, *9*, 100205. [\[CrossRef\]](#)
13. Sayadi, M.H.; Chamanehpour, E.; Fahoul, N. Recent Advances and Future Outlook for Treatment of Pharmaceutical from Water: An Overview. *Int. J. Environ. Sci. Technol.* **2023**, *20*, 3437–3454. [\[CrossRef\]](#)
14. Espinoza-Montero, P.J.; Vega-Verduga, C.; Alulema-Pullupaxi, P.; Fernández, L.; Paz, J.L. Technologies Employed in the Treatment of Water Contaminated with Glyphosate: A Review. *Molecules* **2020**, *25*, 5550. [\[CrossRef\]](#) [\[PubMed\]](#)
15. Rayaroth, M.P.; Aravindakumar, C.T.; Shah, N.S.; Boczkaj, G. Advanced Oxidation Processes (AOPs) Based Wastewater Treatment—Unexpected Nitration Side Reactions—A Serious Environmental Issue: A Review. *Chem. Eng. J.* **2022**, *430*, 133002. [\[CrossRef\]](#)
16. Martínez-Huitle, C.A.; Rodrigo, M.A.; Sirés, I.; Scialdone, O. A Critical Review on Latest Innovations and Future Challenges of Electrochemical Technology for the Abatement of Organics in Water. *Appl. Catal. B Environ.* **2023**, *328*, 122430. [\[CrossRef\]](#)
17. Salvestrini, S.; Fenti, A.; Chianese, S.; Iovino, P.; Musmarra, D. Electro-Oxidation of Humic Acids Using Platinum Electrodes: An Experimental Approach and Kinetic Modelling. *Water* **2020**, *12*, 2250. [\[CrossRef\]](#)
18. Radjenovic, J.; Duinslaeger, N.; Avval, S.S.; Chaplin, B.P. Facing the Challenge of Poly- and Perfluoroalkyl Substances in Water: Is Electrochemical Oxidation the Answer? *Environ. Sci. Technol.* **2020**, *54*, 14815–14829. [\[CrossRef\]](#)
19. He, Y.; Lin, H.; Guo, Z.; Zhang, W.; Li, H.; Huang, W. Recent Developments and Advances in Boron-Doped Diamond Electrodes for Electrochemical Oxidation of Organic Pollutants. *Sep. Purif. Technol.* **2019**, *212*, 802–821. [\[CrossRef\]](#)
20. Comninellis, C. Electrochemical Conversion/Combustion of Organic Pollutants for Waste Water Treatment. *Electrochim. Acta* **1994**, *39*, 1857–1862. [\[CrossRef\]](#)
21. Yang, Y. Recent Advances in the Electrochemical Oxidation Water Treatment: Spotlight on Byproduct Control. *Front. Environ. Sci. Eng.* **2020**, *14*, 85. [\[CrossRef\]](#)
22. Schwarzer-Fischer, E.; Günther, A.; Roszeit, S.; Moritz, T. Combining Zirconia and Titanium Suboxides by Vat Photopolymerization. *Materials* **2021**, *14*, 2394. [\[CrossRef\]](#)
23. Cui, D.; Li, H.; Li, M.; Li, C.; Qian, L.; Zhou, B.; Yang, B. Boron-Doped Graphene Directly Grown on Boron-Doped Diamond for High-Voltage Aqueous Supercapacitors. *ACS Appl. Energy Mater.* **2019**, *2*, 1526–1536. [\[CrossRef\]](#)
24. Li, J.; Guo, M.; Shao, Y.; Yu, H.; Ni, K. Electrocatalytic Properties of a Novel β -PbO₂/Halloysite Nanotube Composite Electrode. *ACS Omega* **2021**, *6*, 5436–5444. [\[CrossRef\]](#)
25. Periyasamy, S.; Muthuchamy, M. Electrochemical Oxidation of Paracetamol in Water by Graphite Anode: Effect of PH, Electrolyte Concentration and Current Density. *J. Environ. Chem. Eng.* **2018**, *6*, 7358–7367. [\[CrossRef\]](#)
26. Pongpichayakul, N.; Themsirimongkon, S.; Maturost, S.; Wangkawong, K.; Fang, L.; Inceesungvorn, B.; Waenkaew, P.; Saipanya, S. Cerium Oxide-Modified Surfaces of Several Carbons as Supports for a Platinum-Based Anode Electrode for Methanol Electro-Oxidation. *Int. J. Hydrogen Energy* **2021**, *46*, 2905–2916. [\[CrossRef\]](#)
27. Ren, H.; Bi, Y.; Liu, F.; Zhang, C.; Wei, N.; Fan, L.; Zhou, R. Removal of Ofloxacin from Wastewater by Chloride Electrolyte Electro-Oxidation: Analysis of the Role of Active Chlorine and Operating Costs. *Sci. Total Environ.* **2022**, *850*, 157963. [\[CrossRef\]](#) [\[PubMed\]](#)
28. Tenny, K.M.; Keenaghan, M. *Ohms Law*; StatPearls Publishing: Treasure Island, FL, USA, 2017.
29. Wang, L.; Lu, J.; Li, L.; Wang, Y.; Huang, Q. Effects of Chloride on Electrochemical Degradation of Perfluorooctanesulfonate by Magnéli Phase Ti₄O₇ and Boron Doped Diamond Anodes. *Water Res.* **2020**, *170*, 115254. [\[CrossRef\]](#) [\[PubMed\]](#)

30. Uwayezu, J.N.; Carabante, I.; Lejon, T.; van Hees, P.; Karlsson, P.; Hollman, P.; Kumpiene, J. Electrochemical Degradation of Per- and Poly-Fluoroalkyl Substances Using Boron-Doped Diamond Electrodes. *J. Environ. Manag.* **2021**, *290*, 112573. [\[CrossRef\]](#) [\[PubMed\]](#)
31. Pierpaoli, M.; Szopińska, M.; Wilk, B.K.; Sobaszek, M.; Łuczkiwicz, A.; Bogdanowicz, R.; Fudala-Książek, S. Electrochemical Oxidation of PFOA and PFOS in Landfill Leachates at Low and Highly Boron-Doped Diamond Electrodes. *J. Hazard. Mater.* **2021**, *403*, 123606. [\[CrossRef\]](#)
32. Lin, H.; Xiao, R.; Xie, R.; Yang, L.; Tang, C.; Wang, R.; Chen, J.; Lv, S.; Huang, Q. Defect Engineering on a Ti₄O₇ Electrode by Ce³⁺ Doping for the Efficient Electrooxidation of Perfluorooctanesulfonate. *Environ. Sci. Technol.* **2021**, *55*, 2597–2607. [\[CrossRef\]](#) [\[PubMed\]](#)
33. Huang, D.; Wang, K.; Niu, J.; Chu, C.; Weon, S.; Zhu, Q.; Lu, J.; Stavitski, E.; Kim, J.-H. Amorphous Pd-Loaded Ti₄O₇ Electrode for Direct Anodic Destruction of Perfluorooctanoic Acid. *Environ. Sci. Technol.* **2020**, *54*, 10954–10963. [\[CrossRef\]](#)
34. Sanni, I.; Karimi Estahbanati, M.R.; Carabin, A.; Drogui, P. Coupling Electrocoagulation with Electro-Oxidation for COD and Phosphorus Removal from Industrial Container Wash Water. *Sep. Purif. Technol.* **2022**, *282*, 119992. [\[CrossRef\]](#)
35. Ken, D.S.; Sinha, A. Dimensionally Stable Anode (Ti/RuO₂) Mediated Electro-Oxidation and Multi-Response Optimization Study for Remediation of Coke-Oven Wastewater. *J. Environ. Chem. Eng.* **2021**, *9*, 105025. [\[CrossRef\]](#)
36. Wang, H.; Li, Z.; Zhang, F.; Wang, Y.; Zhang, X.; Wang, J.; He, X. Comparison of Ti/Ti₄O₇, Ti/Ti₄O₇-PbO₂-Ce, and Ti/Ti₄O₇ Nanotube Array Anodes for Electro-Oxidation of p-Nitrophenol and Real Wastewater. *Sep. Purif. Technol.* **2021**, *266*, 118600. [\[CrossRef\]](#)
37. Lebik-Elhadi, H.; Frontistis, Z.; Ait-Amar, H.; Amrani, S.; Mantzavinos, D. Electrochemical Oxidation of Pesticide Thiamethoxam on Boron Doped Diamond Anode: Role of Operating Parameters and Matrix Effect. *Process Saf. Environ. Prot.* **2018**, *116*, 535–541. [\[CrossRef\]](#)
38. Martínez-Huitle, C.A.; Rodrigo, M.A.; Sirés, I.; Scialdone, O. Single and Coupled Electrochemical Processes and Reactors for the Abatement of Organic Water Pollutants: A Critical Review. *Chem. Rev.* **2015**, *115*, 13362–13407. [\[CrossRef\]](#)
39. He, Y.; Zhao, D.; Lin, H.; Huang, H.; Li, H.; Guo, Z. Design of Diamond Anodes in Electrochemical Degradation of Organic Pollutants. *Curr. Opin. Electrochem.* **2022**, *32*, 100878. [\[CrossRef\]](#)
40. Urtiaga, A.; Fernández-González, C.; Gómez-Lavín, S.; Ortiz, I. Kinetics of the Electrochemical Mineralization of Perfluorooctanoic Acid on Ultrananocrystalline Boron Doped Conductive Diamond Electrodes. *Chemosphere* **2015**, *129*, 20–26. [\[CrossRef\]](#)
41. Zhang, C.; Tang, J.; Peng, C.; Jin, M. Degradation of Perfluorinated Compounds in Wastewater Treatment Plant Effluents by Electrochemical Oxidation with Nano-ZnO Coated Electrodes. *J. Mol. Liq.* **2016**, *221*, 1145–1150. [\[CrossRef\]](#)
42. Barisci, S.; Suri, R. Electrooxidation of Short and Long Chain Perfluorocarboxylic Acids Using Boron Doped Diamond Electrodes. *Chemosphere* **2020**, *243*, 125349. [\[CrossRef\]](#) [\[PubMed\]](#)
43. Sukeesan, S.; Boontanon, N.; Boontanon, S.K. Improved Electrical Driving Current of Electrochemical Treatment of Per- and Polyfluoroalkyl Substances (PFAS) in Water Using Boron-Doped Diamond Anode. *Environ. Technol. Innov.* **2021**, *23*, 101655. [\[CrossRef\]](#)
44. Zhuo, Q.; Xiang, Q.; Yi, H.; Zhang, Z.; Yang, B.; Cui, K.; Bing, X.; Xu, Z.; Liang, X.; Guo, Q.; et al. Electrochemical Oxidation of PFOA in Aqueous Solution Using Highly Hydrophobic Modified PbO₂ Electrodes. *J. Electroanal. Chem.* **2017**, *801*, 235–243. [\[CrossRef\]](#)
45. Song, Y.; Xiao, M.; Li, Z.; Luo, Y.; Zhang, K.; Du, X.; Zhang, T.; Wang, Z.; Liang, H. Degradation of Antibiotics, Organic Matters and Ammonia during Secondary Wastewater Treatment Using Boron-Doped Diamond Electro-Oxidation Combined with Ceramic Ultrafiltration. *Chemosphere* **2022**, *286*, 131680. [\[CrossRef\]](#) [\[PubMed\]](#)
46. Özcan, A.; Şahin, Y.; Koparal, A.S.; Oturan, M.A. Prophan Mineralization in Aqueous Medium by Anodic Oxidation Using Boron-Doped Diamond Anode: Influence of Experimental Parameters on Degradation Kinetics and Mineralization Efficiency. *Water Res.* **2008**, *42*, 2889–2898. [\[CrossRef\]](#)
47. Sirés, I.; Brillas, E.; Oturan, M.A.; Rodrigo, M.A.; Panizza, M. Electrochemical Advanced Oxidation Processes: Today and Tomorrow. A Review. *Environ. Sci. Pollut. Res.* **2014**, *21*, 8336–8367. [\[CrossRef\]](#)
48. Comninellis, C.; Chen, G. (Eds.) *Electrochemistry for the Environment*; Springer: New York, NY, USA, 2010; ISBN 978-0-387-36922-8.
49. Flox, C.; Cabot, P.L.; Centellas, F.; Garrido, J.A.; Rodríguez, R.M.; Arias, C.; Brillas, E. Electrochemical Combustion of Herbicide Mecoprop in Aqueous Medium Using a Flow Reactor with a Boron-Doped Diamond Anode. *Chemosphere* **2006**, *64*, 892–902. [\[CrossRef\]](#)
50. Panizza, M.; Cerisola, G. Removal of Colour and COD from Wastewater Containing Acid Blue 22 by Electrochemical Oxidation. *J. Hazard. Mater.* **2008**, *153*, 83–88. [\[CrossRef\]](#)
51. Anglada, A.; Urtiaga, A.; Ortiz, I. Contributions of Electrochemical Oxidation to Waste-Water Treatment: Fundamentals and Review of Applications. *J. Chem. Technol. Biotechnol.* **2009**, *84*, 1747–1755. [\[CrossRef\]](#)
52. Biswas, B.; Goel, S. Electrocoagulation and Electrooxidation Technologies for Pesticide Removal from Water or Wastewater: A Review. *Chemosphere* **2022**, *302*, 134709. [\[CrossRef\]](#)
53. Zhuo, Q.; Han, J.; Niu, J.; Zhang, J. Degradation of a Persistent Organic Pollutant Perfluorooctane Sulphonate with Ti/SnO₂-Sb₂O₅/PbO₂-PTFE Anode. *Emerg. Contam.* **2020**, *6*, 44–52. [\[CrossRef\]](#)
54. Ma, Q.; Liu, L.; Cui, W.; Li, R.; Song, T.; Cui, Z. Electrochemical Degradation of Perfluorooctanoic Acid (PFOA) by Yb-Doped Ti/SnO₂-Sb/PbO₂ Anodes and Determination of the Optimal Conditions. *RSC Adv.* **2015**, *5*, 84856–84864. [\[CrossRef\]](#)

55. Danial, R.; Sobri, S.; Abdullah, L.C.; Mobarekeh, M.N. FTIR, CHNS and XRD Analyses Define Mechanism of Glyphosate Herbicide Removal by Electrocoagulation. *Chemosphere* **2019**, *233*, 559–569. [\[CrossRef\]](#)
56. Behloul, M.; Grib, H.; Drouiche, N.; Abdi, N.; Lounici, H.; Mameri, N. Removal of Malathion Pesticide from Polluted Solutions by Electrocoagulation: Modeling of Experimental Results Using Response Surface Methodology. *Sep. Sci. Technol.* **2013**, *48*, 664–672. [\[CrossRef\]](#)
57. Lin, H.; Niu, J.; Xu, J.; Huang, H.; Li, D.; Yue, Z.; Feng, C. Highly Efficient and Mild Electrochemical Mineralization of Long-Chain Perfluorocarboxylic Acids (C9–C10) by Ti/SnO₂–Sb–Ce, Ti/SnO₂–Sb/Ce–PbO₂, and Ti/BDD Electrodes. *Environ. Sci. Technol.* **2013**, *47*, 13039–13046. [\[CrossRef\]](#) [\[PubMed\]](#)
58. Kamaraj, R.; Davidson, D.J.; Sozhan, G.; Vasudevan, S. Adsorption of 2,4-Dichlorophenoxyacetic Acid (2,4-D) from Water by in Situ Generated Metal Hydroxides Using Sacrificial Anodes. *J. Taiwan Inst. Chem. Eng.* **2014**, *45*, 2943–2949. [\[CrossRef\]](#)
59. Walsh, F.C.; Ponce de León, C. Progress in Electrochemical Flow Reactors for Laboratory and Pilot Scale Processing. *Electrochim. Acta* **2018**, *280*, 121–148. [\[CrossRef\]](#)
60. Cornejo, O.M.; Murrieta, M.F.; Castañeda, L.F.; Nava, J.L. Electrochemical Reactors Equipped with BDD Electrodes: Geometrical Aspects and Applications in Water Treatment. *Curr. Opin. Solid State Mater. Sci.* **2021**, *25*, 100935. [\[CrossRef\]](#)
61. Magro, C.; Mateus, E.P.; Paz-Garcia, J.M.; Ribeiro, A.B. Emerging Organic Contaminants in Wastewater: Understanding Electrochemical Reactors for Triclosan and Its by-Products Degradation. *Chemosphere* **2020**, *247*, 125758. [\[CrossRef\]](#)
62. Hao, Y.; Ma, H.; Proietto, F.; Galia, A.; Scialdone, O. Electrochemical Treatment of Wastewater Contaminated by Organics and Containing Chlorides: Effect of Operative Parameters on the Abatement of Organics and the Generation of Chlorinated by-Products. *Electrochim. Acta* **2022**, *402*, 139480. [\[CrossRef\]](#)
63. Periyasamy, S.; Lin, X.; Ganiyu, S.O.; Kamaraj, S.-K.; Thiam, A.; Liu, D. Insight into BDD Electrochemical Oxidation of Florfenicol in Water: Kinetics, Reaction Mechanism, and Toxicity. *Chemosphere* **2022**, *288*, 132433. [\[CrossRef\]](#)
64. Calzadilla, W.; Espinoza, L.C.; Diaz-Cruz, M.S.; Sunyer, A.; Aranda, M.; Peña-Farfal, C.; Salazar, R. Simultaneous Degradation of 30 Pharmaceuticals by Anodic Oxidation: Main Intermediaries and by-Products. *Chemosphere* **2021**, *269*, 128753. [\[CrossRef\]](#)
65. Vogt, H. The Quantities Affecting the Bubble Coverage of Gas-Evolving Electrodes. *Electrochim. Acta* **2017**, *235*, 495–499. [\[CrossRef\]](#)
66. Angulo, A.; Van der Linde, P.; Gardeniers, H.; Modestino, M. David Fernández Rivas Influence of Bubbles on the Energy Conversion Efficiency of Electrochemical Reactors. *Joule* **2020**, *4*, 555–579. [\[CrossRef\]](#)
67. Najafpoor, A.A.; Davoudi, M.; Rahmanpour Salmani, E. Decolorization of Synthetic Textile Wastewater Using Electrochemical Cell Divided by Cellulosic Separator. *J. Environ. Health Sci. Eng.* **2017**, *15*, 11. [\[CrossRef\]](#)
68. Matheswaran, M.; Balaji, S.; Chung, S.-J. Electro-Oxidation Kinetics of Cerium(III) in Nitric Acid Using Divided Electrochemical Cell for Application in the Mediated Electrochemical Oxidation of Phenol. *Bull. Korean Chem. Soc.* **2007**, *28*, 1329–1334. [\[CrossRef\]](#)
69. Mora-Gomez, J.; Ortega, E.; Mestre, S.; Pérez-Herranz, V.; García-Gabaldón, M. Electrochemical Degradation of Norfloxacin Using BDD and New Sb-Doped SnO₂ Ceramic Anodes in an Electrochemical Reactor in the Presence and Absence of a Cation-Exchange Membrane. *Sep. Purif. Technol.* **2019**, *208*, 68–75. [\[CrossRef\]](#)
70. Sandoval, M.A.; Calzadilla, W.; Salazar, R. Influence of Reactor Design on the Electrochemical Oxidation and Disinfection of Wastewaters Using Boron-Doped Diamond Electrodes. *Curr. Opin. Electrochem.* **2022**, *33*, 100939. [\[CrossRef\]](#)
71. Hirata, H.; Dobrokhotov, O.; Sokabe, M. Coordination between Cell Motility and Cell Cycle Progression in Keratinocyte Sheets via Cell-Cell Adhesion and Rac1. *iScience* **2020**, *23*, 101729. [\[CrossRef\]](#)
72. Trellu, C.; Chaplin, B.P.; Coetsier, C.; Esmilaire, R.; Cerneaux, S.; Causserand, C.; Cretin, M. Electro-Oxidation of Organic Pollutants by Reactive Electrochemical Membranes. *Chemosphere* **2018**, *208*, 159–175. [\[CrossRef\]](#)
73. Nicholls, T.P.; Schotten, C.; Willans, C.E. Electrochemistry in Continuous Systems. *Curr. Opin. Green Sustain. Chem.* **2020**, *26*, 100355. [\[CrossRef\]](#)
74. Cornejo, O.M.; Murrieta, M.F.; Castañeda, L.F.; Nava, J.L. Characterization of the Reaction Environment in Flow Reactors Fitted with BDD Electrodes for Use in Electrochemical Advanced Oxidation Processes: A Critical Review. *Electrochim. Acta* **2020**, *331*, 135373. [\[CrossRef\]](#)
75. Rivera, F.F.; Pérez, T.; Castañeda, L.F.; Nava, J.L. Mathematical Modeling and Simulation of Electrochemical Reactors: A Critical Review. *Chem. Eng. Sci.* **2021**, *239*, 116622. [\[CrossRef\]](#)
76. Nava, J.L.; Oropeza, M.T.; Ponce de León, C.; González-García, J.; Frías-Ferrer, A.J. Determination of the Effective Thickness of a Porous Electrode in a Flow-through Reactor; Effect of the Specific Surface Area of Stainless Steel Fibres, Used as a Porous Cathode, during the Deposition of Ag(I) Ions. *Hydrometallurgy* **2008**, *91*, 98–103. [\[CrossRef\]](#)
77. Wang, Y.; Chen, M.; Wang, C.; Meng, X.; Zhang, W.; Chen, Z.; Crittenden, J. Electrochemical Degradation of Methylisothiazolinone by Using Ti/SnO₂–Sb₂O₃/α, β-PbO₂ Electrode: Kinetics, Energy Efficiency, Oxidation Mechanism and Degradation Pathway. *Chem. Eng. J.* **2019**, *374*, 626–636. [\[CrossRef\]](#)
78. Zhang, C.; Zhao, X.; Wang, C.; Pan, S. Novel Multistage Electrochemical Flow-through Mode (EFTM) with Porous Electrodes for Reclaimed Wastewater Treatment in Pipes. *ACS EST Water* **2021**, *1*, 653–660. [\[CrossRef\]](#)
79. Lang, Z.; Zhou, M.; Zhang, Q.; Yin, X.; Li, Y. Comprehensive Treatment of Marine Aquaculture Wastewater by a Cost-Effective Flow-through Electro-Oxidation Process. *Sci. Total Environ.* **2020**, *722*, 137812. [\[CrossRef\]](#)
80. Garcia-Segura, S.; Ocon, J.D.; Chong, M.N. Electrochemical Oxidation Remediation of Real Wastewater Effluents—A Review. *Process Saf. Environ. Prot.* **2018**, *113*, 48–67. [\[CrossRef\]](#)

81. Panizza, M.; Cerisola, G. Direct And Mediated Anodic Oxidation of Organic Pollutants. *Chem. Rev.* **2009**, *109*, 6541–6569. [\[CrossRef\]](#)
82. Ghanbari, F.; Wang, Q.; Hassani, A.; Waclawek, S.; Rodríguez-Chueca, J.; Lin, K.-Y.A. Electrochemical Activation of Peroxides for Treatment of Contaminated Water with Landfill Leachate: Efficacy, Toxicity and Biodegradability Evaluation. *Chemosphere* **2021**, *279*, 130610. [\[CrossRef\]](#)
83. Martínez-Huitle, C.A.; Panizza, M. Electrochemical Oxidation of Organic Pollutants for Wastewater Treatment. *Curr. Opin. Electrochem.* **2018**, *11*, 62–71. [\[CrossRef\]](#)
84. Nidheesh, P.V.; Kumar, A.; Syam Babu, D.; Scaria, J.; Suresh Kumar, M. Treatment of Mixed Industrial Wastewater by Electrocoagulation and Indirect Electrochemical Oxidation. *Chemosphere* **2020**, *251*, 126437. [\[CrossRef\]](#) [\[PubMed\]](#)
85. Groenen Serrano, K. Indirect Electrochemical Oxidation Using Hydroxyl Radical, Active Chlorine, and Peroxodisulfate. In *Electrochemical Water and Wastewater Treatment*; Elsevier: Amsterdam, The Netherlands, 2018; pp. 133–164.
86. Cai, J.; Zhou, M.; Liu, Y.; Savall, A.; Groenen Serrano, K. Indirect Electrochemical Oxidation of 2,4-Dichlorophenoxyacetic Acid Using Electrochemically-Generated Persulfate. *Chemosphere* **2018**, *204*, 163–169. [\[CrossRef\]](#) [\[PubMed\]](#)
87. Tian, S.; Tu, Y.; Chen, J.; Shao, G.; Zhou, Z.; Ren, Z. Persulfate Enhanced Electrochemical Oxidation of Phenol with CuFe_2O_4 /ACF (Activated Carbon Fibers) Cathode. *Sep. Purif. Technol.* **2021**, *279*, 119727. [\[CrossRef\]](#)
88. Song, H.; Yan, L.; Ma, J.; Jiang, J.; Cai, G.; Zhang, W.; Zhang, Z.; Zhang, J.; Yang, T. Nonradical Oxidation from Electrochemical Activation of Peroxydisulfate at Ti/Pt Anode: Efficiency, Mechanism and Influencing Factors. *Water Res.* **2017**, *116*, 182–193. [\[CrossRef\]](#)
89. Almasi, A.; Esmaeilpoor, R.; Hoseini, H.; Abtin, V.; Mohammadi, M. Photocatalytic Degradation of Cephalexin by UV Activated Persulfate and Fenton in Synthetic Wastewater: Optimization, Kinetic Study, Reaction Pathway and Intermediate Products. *J. Environ. Health Sci. Eng.* **2020**, *18*, 1359–1373. [\[CrossRef\]](#)
90. Mazivila, S.J.; Ricardo, I.A.; Leitão, J.M.M.; Esteves da Silva, J.C.G. A Review on Advanced Oxidation Processes: From Classical to New Perspectives Coupled to Two- and Multi-Way Calibration Strategies to Monitor Degradation of Contaminants in Environmental Samples. *Trends Environ. Anal. Chem.* **2019**, *24*, e00072. [\[CrossRef\]](#)
91. Ganiyu, S.O.; Sable, S.; Gamal El-Din, M. Advanced Oxidation Processes for the Degradation of Dissolved Organics in Produced Water: A Review of Process Performance, Degradation Kinetics and Pathway. *Chem. Eng. J.* **2022**, *429*, 132492. [\[CrossRef\]](#)
92. Wilk, B.K.; Szopińska, M.; Luczkiewicz, A.; Sobaszek, M.; Siedlecka, E.; Fudala-Ksiazek, S. Kinetics of the Organic Compounds and Ammonium Nitrogen Electrochemical Oxidation in Landfill Leachates at Boron-Doped Diamond Anodes. *Materials* **2021**, *14*, 4971. [\[CrossRef\]](#)
93. Li, S.; Bejan, D.; McDowell, M.S.; Bunce, N.J. Mixed First and Zero Order Kinetics in the Electrooxidation of Sulfamethoxazole at a Boron-Doped Diamond (BDD) Anode. *J. Appl. Electrochem.* **2008**, *38*, 151–159. [\[CrossRef\]](#)
94. Cui, Y.H.; Feng, Y.J.; Li, X.Y. Kinetics and Efficiency Analysis of Electrochemical Oxidation of Phenol: Influence of Anode Materials and Operational Conditions. *Chem. Eng. Technol.* **2011**, *34*, 265–272. [\[CrossRef\]](#)
95. Ganiyu, S.O.; Oturan, N.; Raffy, S.; Cretin, M.; Esmilaire, R.; van Hullebusch, E.; Esposito, G.; Oturan, M.A. Sub-Stoichiometric Titanium Oxide (Ti_4O_7) as a Suitable Ceramic Anode for Electrooxidation of Organic Pollutants: A Case Study of Kinetics, Mineralization and Toxicity Assessment of Amoxicillin. *Water Res.* **2016**, *106*, 171–182. [\[CrossRef\]](#) [\[PubMed\]](#)
96. Oturan, M.A.; Aaron, J.-J. Advanced Oxidation Processes in Water/Wastewater Treatment: Principles and Applications. A Review. *Crit. Rev. Environ. Sci. Technol.* **2014**, *44*, 2577–2641. [\[CrossRef\]](#)
97. Öztürk, H.; Barışçi, S.; Turkyay, O. Paracetamol Degradation and Kinetics by Advanced Oxidation Processes (AOPs): Electro-Peroxone, Ozonation, Goethite Catalyzed Electro-Fenton and Electro-Oxidation. *Environ. Eng. Res.* **2020**, *26*, 180332. [\[CrossRef\]](#)
98. Hai, H.; Xing, X.; Li, S.; Xia, S.; Xia, J. Electrochemical Oxidation of Sulfamethoxazole in BDD Anode System: Degradation Kinetics, Mechanisms and Toxicity Evaluation. *Sci. Total Environ.* **2020**, *738*, 139909. [\[CrossRef\]](#) [\[PubMed\]](#)
99. Olvera-Vargas, H.; Oturan, N.; Aravindakumar, C.T.; Paul, M.M.S.; Sharma, V.K.; Oturan, M.A. Electro-Oxidation of the Dye Azure B: Kinetics, Mechanism, and by-Products. *Environ. Sci. Pollut. Res.* **2014**, *21*, 8379–8386. [\[CrossRef\]](#)
100. Brillas, E.; Garcia-Segura, S.; Skoumal, M.; Arias, C. Electrochemical Incineration of Diclofenac in Neutral Aqueous Medium by Anodic Oxidation Using Pt and Boron-Doped Diamond Anodes. *Chemosphere* **2010**, *79*, 605–612. [\[CrossRef\]](#)
101. Kaur, P.; Kushwaha, J.P.; Sangal, V.K. Evaluation and Disposability Study of Actual Textile Wastewater Treatment by Electro-Oxidation Method Using Ti/RuO₂ Anode. *Process Saf. Environ. Prot.* **2017**, *111*, 13–22. [\[CrossRef\]](#)
102. Bolton, J.R.; Bircher, K.G.; Tumas, W.; Tolman, C.A. Figures-of-Merit for the Technical Development and Application of Advanced Oxidation Technologies for Both Electric- and Solar-Driven Systems (IUPAC Technical Report). *Pure Appl. Chem.* **2001**, *73*, 627–637. [\[CrossRef\]](#)
103. Pica, N.E.; Funkhouser, J.; Yin, Y.; Zhang, Z.; Ceres, D.M.; Tong, T.; Blotvogel, J. Electrochemical Oxidation of Hexafluoropropylene Oxide Dimer Acid (GenX): Mechanistic Insights and Efficient Treatment Train with Nanofiltration. *Environ. Sci. Technol.* **2019**, *53*, 12602–12609. [\[CrossRef\]](#)
104. Kumar, S.; Singh, S.; Srivastava, V.C. Electro-Oxidation of Nitrophenol by Ruthenium Oxide Coated Titanium Electrode: Parametric, Kinetic and Mechanistic Study. *Chem. Eng. J.* **2015**, *263*, 135–143. [\[CrossRef\]](#)
105. Cañizares, P.; Paz, R.; Sáez, C.; Rodrigo, M.A. Costs of the Electrochemical Oxidation of Wastewaters: A Comparison with Ozonation and Fenton Oxidation Processes. *J. Environ. Manag.* **2009**, *90*, 410–420. [\[CrossRef\]](#)

106. Chatzisyneon, E.; Xekoukoulotakis, N.P.; Coz, A.; Kalogerakis, N.; Mantzavinos, D. Electrochemical Treatment of Textile Dyes and Dyehouse Effluents. *J. Hazard. Mater.* **2006**, *137*, 998–1007. [\[CrossRef\]](#)
107. Subbaramaiah, V.; Srivastava, V.C.; Mall, I.D. Catalytic Wet Peroxidation of Pyridine Bearing Wastewater by Cerium Supported SBA-15. *J. Hazard. Mater.* **2013**, *248–249*, 355–363. [\[CrossRef\]](#) [\[PubMed\]](#)
108. Kaur, R.; Kushwaha, J.P.; Singh, N. Electro-Oxidation of Ofloxacin Antibiotic by Dimensionally Stable Ti/RuO₂ Anode: Evaluation and Mechanistic Approach. *Chemosphere* **2018**, *193*, 685–694. [\[CrossRef\]](#) [\[PubMed\]](#)
109. Sales Solano, A.M.; Costa de Araújo, C.K.; Vieira de Melo, J.; Peralta-Hernandez, J.M.; Ribeiro da Silva, D.; Martínez-Huitle, C.A. Decontamination of Real Textile Industrial Effluent by Strong Oxidant Species Electrogenerated on Diamond Electrode: Viability and Disadvantages of This Electrochemical Technology. *Appl. Catal. B Environ.* **2013**, *130–131*, 112–120. [\[CrossRef\]](#)
110. Tsantaki, E.; Velegraki, T.; Katsaounis, A.; Mantzavinos, D. Anodic Oxidation of Textile Dyehouse Effluents on Boron-Doped Diamond Electrode. *J. Hazard. Mater.* **2012**, *207–208*, 91–96. [\[CrossRef\]](#) [\[PubMed\]](#)
111. Chen, H.; Yoshida, G.; Andriamanohiarisoamanana, F.J.; Ihara, I. Electro-Oxidation Combined with Electro-Fenton for Decolorization of Caramel Colorant Aqueous Solution Using BDD Electrodes. *J. Water Process Eng.* **2022**, *47*, 102672. [\[CrossRef\]](#)
112. Antonelli, R.; Malpass, G.R.P.; Carlos da Silva, M.G.; Vieira, M.G.A. Ofloxacin Degradation in Chloride-Containing Medium by Photo-Assisted Sono-electrochemical Process Using a Mixed Metal Oxide Anode. *J. Environ. Chem. Eng.* **2022**, *10*, 107174. [\[CrossRef\]](#)
113. Moreira, F.C.; Boaventura, R.A.R.; Brillas, E.; Vilar, V.J.P. Electrochemical Advanced Oxidation Processes: A Review on Their Application to Synthetic and Real Wastewaters. *Appl. Catal. B Environ.* **2017**, *202*, 217–261. [\[CrossRef\]](#)
114. Matyszczyk, G.; Sędkowska, A.; Kuś, S. Comparative Degradation of Metanil Yellow in the Electro-Fenton Process with Different Catalysts: A Simplified Kinetic Model Study. *Dye. Pigment.* **2020**, *174*, 108076. [\[CrossRef\]](#)
115. Syam Babu, D.; Nidheesh, P.V. Treatment of Arsenite Contaminated Water by Electrochemically Activated Persulfate Oxidation Process. *Sep. Purif. Technol.* **2022**, *282*, 119999. [\[CrossRef\]](#)
116. Shahedi, A.; Darban, A.K.; Taghipour, F.; Jamshidi-Zanjani, A. A Review on Industrial Wastewater Treatment via Electrocoagulation Processes. *Curr. Opin. Electrochem.* **2020**, *22*, 154–169. [\[CrossRef\]](#)
117. Fenti, A.; Minò, A.; Salvestrini, S. Thermal- and MnO₂-Activated Peroxydisulfate for Diuron Removal from Water. *Clean Technol.* **2022**, *4*, 1071–1087. [\[CrossRef\]](#)
118. Zaroni, M.V.B.; Irikura, K.; Perini, J.A.L.; Bessegato, G.G.; Sandoval, M.A.; Salazar, R. Recent Achievements in Photoelectrocatalytic Degradation of Pesticides. *Curr. Opin. Electrochem.* **2022**, *35*, 101020. [\[CrossRef\]](#)
119. Li, J.; Li, Y.; Xiong, Z.; Yao, G.; Lai, B. The Electrochemical Advanced Oxidation Processes Coupling of Oxidants for Organic Pollutants Degradation: A Mini-Review. *Chin. Chem. Lett.* **2019**, *30*, 2139–2146. [\[CrossRef\]](#)
120. Ye, S.; Chen, Y.; Yao, X.; Zhang, J. Simultaneous Removal of Organic Pollutants and Heavy Metals in Wastewater by Photoelectrocatalysis: A Review. *Chemosphere* **2021**, *273*, 128503. [\[CrossRef\]](#)
121. Alulema-Pullupaxi, P.; Espinoza-Montero, P.J.; Sigcha-Pallo, C.; Vargas, R.; Fernández, L.; Peralta-Hernández, J.M.; Paz, J.L. Fundamentals and Applications of Photoelectrocatalysis as an Efficient Process to Remove Pollutants from Water: A Review. *Chemosphere* **2021**, *281*, 130821. [\[CrossRef\]](#)
122. Pirsaeheb, M.; Hoseini, H.; Abtin, V. Photoelectrocatalytic Degradation of Humic Acid and Disinfection over Ni TiO₂-Ni/AC-PTFE Electrode under Natural Sunlight Irradiation: Modeling, Optimization and Reaction Pathway. *J. Taiwan Inst. Chem. Eng.* **2021**, *118*, 204–214. [\[CrossRef\]](#)
123. Bessegato, G.G.; Guaraldo, T.T.; de Brito, J.F.; Brugnera, M.F.; Zaroni, M.V.B. Achievements and Trends in Photoelectrocatalysis: From Environmental to Energy Applications. *Electrocatalysis* **2015**, *6*, 415–441. [\[CrossRef\]](#)
124. Alulema-Pullupaxi, P.; Fernández, L.; Debut, A.; Santacruz, C.P.; Villacis, W.; Fierro, C.; Espinoza-Montero, P.J. Photoelectrocatalytic Degradation of Glyphosate on Titanium Dioxide Synthesized by Sol-Gel/Spin-Coating on Boron Doped Diamond (TiO₂/BDD) as a Photoanode. *Chemosphere* **2021**, *278*, 130488. [\[CrossRef\]](#)
125. Pandis, P.K.; Kalogirou, C.; Kanellou, E.; Vaitsis, C.; Savvidou, M.G.; Sourkouni, G.; Zorpas, A.A.; Argiris, C. Key Points of Advanced Oxidation Processes (AOPs) for Wastewater, Organic Pollutants and Pharmaceutical Waste Treatment: A Mini Review. *ChemEngineering* **2022**, *6*, 8. [\[CrossRef\]](#)
126. Peleyeju, M.G.; Arotiba, O.A. Recent Trend in Visible-Light Photoelectrocatalytic Systems for Degradation of Organic Contaminants in Water/Wastewater. *Environ. Sci. Water Res. Technol.* **2018**, *4*, 1389–1411. [\[CrossRef\]](#)
127. Asahi, R.; Morikawa, T.; Irie, H.; Ohwaki, T. Nitrogen-Doped Titanium Dioxide as Visible-Light-Sensitive Photocatalyst: Designs, Developments, and Prospects. *Chem. Rev.* **2014**, *114*, 9824–9852. [\[CrossRef\]](#)
128. Zarei, E.; Ojani, R. Fundamentals and Some Applications of Photoelectrocatalysis and Effective Factors on Its Efficiency: A Review. *J. Solid State Electrochem.* **2017**, *21*, 305–336. [\[CrossRef\]](#)
129. Liu, H.; Li, C.; Zhang, T.; Xu, Z.; Li, Y.; Li, B.; Tian, S. UV Facilitated Synergistic Effects of Polymetals in Ore Catalyst on Peroxymonosulfate Activation: Implication for the Degradation of Bisphenol S. *Chem. Eng. J.* **2022**, *431*, 133989. [\[CrossRef\]](#)
130. Zhang, F.; Li, M.; Li, W.; Feng, C.; Jin, Y.; Guo, X.; Cui, J. Degradation of Phenol by a Combined Independent Photocatalytic and Electrochemical Process. *Chem. Eng. J.* **2011**, *175*, 349–355. [\[CrossRef\]](#)
131. Montenegro-Ayo, R.; Morales-Gomero, J.C.; Alarcon, H.; Cotillas, S.; Westerhoff, P.; Garcia-Segura, S. Scaling up Photoelectrocatalytic Reactors: A TiO₂ Nanotube-Coated Disc Compound Reactor Effectively Degrades Acetaminophen. *Water* **2019**, *11*, 2522. [\[CrossRef\]](#)

132. Li, K.; Zhang, H.; Ma, Y.; Sun, T.; Jia, J. Nanostructured Polypyrrole Cathode Based Dual Rotating Disk Photo Fuel Cell for Textile Wastewater Purification and Electricity Generation. *Electrochim. Acta* **2019**, *303*, 329–340. [[CrossRef](#)]
133. He, H.; Zong, M.; Dong, F.; Yang, P.; Ke, G.; Liu, M.; Nie, X.; Ren, W.; Bian, L. Simultaneous Removal and Recovery of Uranium from Aqueous Solution Using TiO₂ Photoelectrochemical Reduction Method. *J. Radioanal. Nucl. Chem.* **2017**, *313*, 59–67. [[CrossRef](#)]
134. Fernández-Domene, R.M.; Sánchez-Tovar, R.; Lucas-granados, B.; Muñoz-Portero, M.J.; García-Antón, J. Elimination of Pesticide Atrazine by Photoelectrocatalysis Using a Photoanode Based on WO₃ Nanosheets. *Chem. Eng. J.* **2018**, *350*, 1114–1124. [[CrossRef](#)]
135. Liu, Y.; Gan, X.; Zhou, B.; Xiong, B.; Li, J.; Dong, C.; Bai, J.; Cai, W. Photoelectrocatalytic Degradation of Tetracycline by Highly Effective TiO₂ Nanopore Arrays Electrode. *J. Hazard. Mater.* **2009**, *171*, 678–683. [[CrossRef](#)] [[PubMed](#)]
136. Fan, X.; Zhou, Y.; Zhang, G.; Liu, T.; Dong, W. In Situ Photoelectrochemical Activation of Sulfite by MoS₂ Photoanode for Enhanced Removal of Ammonium Nitrogen from Wastewater. *Appl. Catal. B Environ.* **2019**, *244*, 396–406. [[CrossRef](#)]
137. Subba Rao, A.N.; Venkatarangaiah, V.T. Preparation, Characterization, and Application of Ti/TiO₂-NTs/Sb-SnO₂ Electrode in Photo-Electrochemical Treatment of Industrial Effluents under Mild Conditions. *Environ. Sci. Pollut. Res.* **2018**, *25*, 11480–11492. [[CrossRef](#)] [[PubMed](#)]
138. Peng, Y.-P.; Chen, H.; Huang, C.P. The Synergistic Effect of Photoelectrochemical (PEC) Reactions Exemplified by Concurrent Perfluorooctanoic Acid (PFOA) Degradation and Hydrogen Generation over Carbon and Nitrogen Codoped TiO₂ Nanotube Arrays (C-N-TNTAs) Photoelectrode. *Appl. Catal. B Environ.* **2017**, *209*, 437–446. [[CrossRef](#)]
139. Sun, J.; Maimaiti, H.; Xu, B.; Feng, L.; Bao, J.; Zhao, X. Photoelectrocatalytic Degradation of Wastewater and Simultaneous Hydrogen Production on Copper Nanorod-Supported Coal-Based N-Carbon Dot Composite Nanocatalysts. *Appl. Surf. Sci.* **2022**, *585*, 152701. [[CrossRef](#)]

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.