

Supplementary Materials

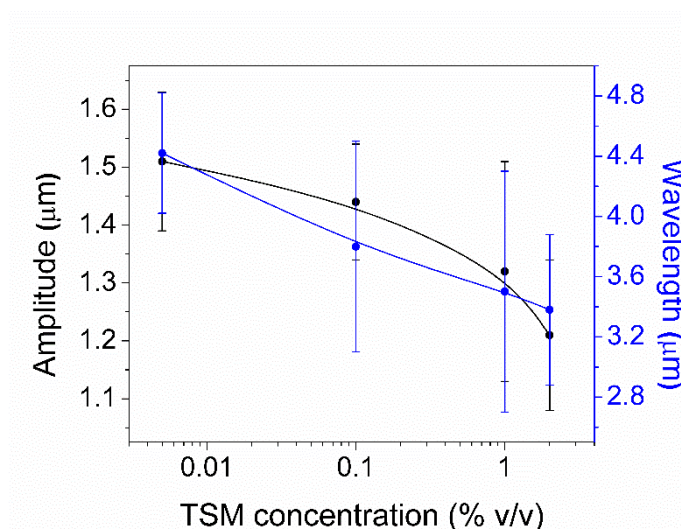


Figure S1. Amplitude and wavelength of the wrinkled patterns obtained by using different concentrations of TSM (0.005 %, 0.1 %, 1 %, and 2 % v/v) during functionalization process.