

Supplementary Materials for:



Fabrication of Conducting Polyacrylate Resin Solution with Polyaniline Nanofiber and Graphene for Conductive 3D Printing Application

Hoseong Han¹ and Sunghun Cho^{1,*}

¹ School of Chemical Engineering, Yeungnam University, Gyeongsan 38541, Republic of Korea.

*E-mail: shcho83@ynu.ac.kr

Tel.: +82-53-810-535

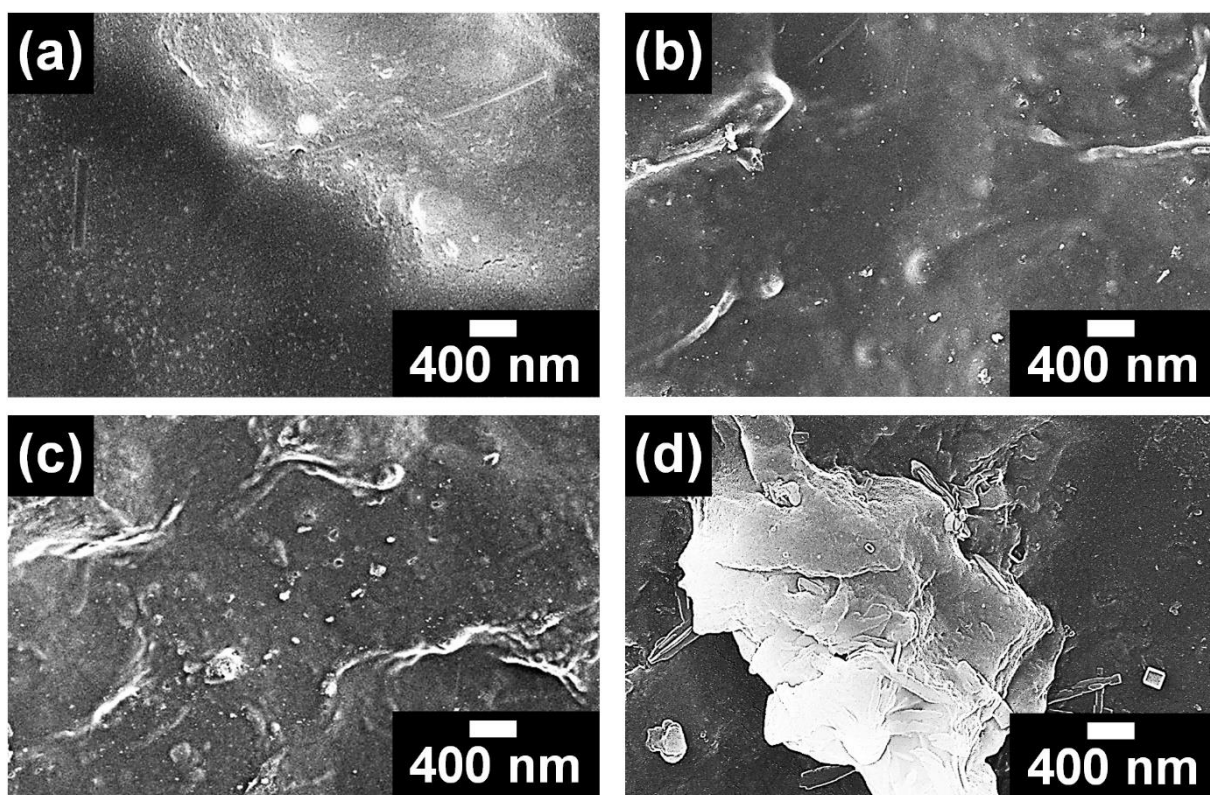


Figure S1. FE-SEM images of polyacrylate composites containing different PANI NF content: (a) 1 wt %, (b) 2 wt %, (c) 5 wt %, and (d) 10 wt %.

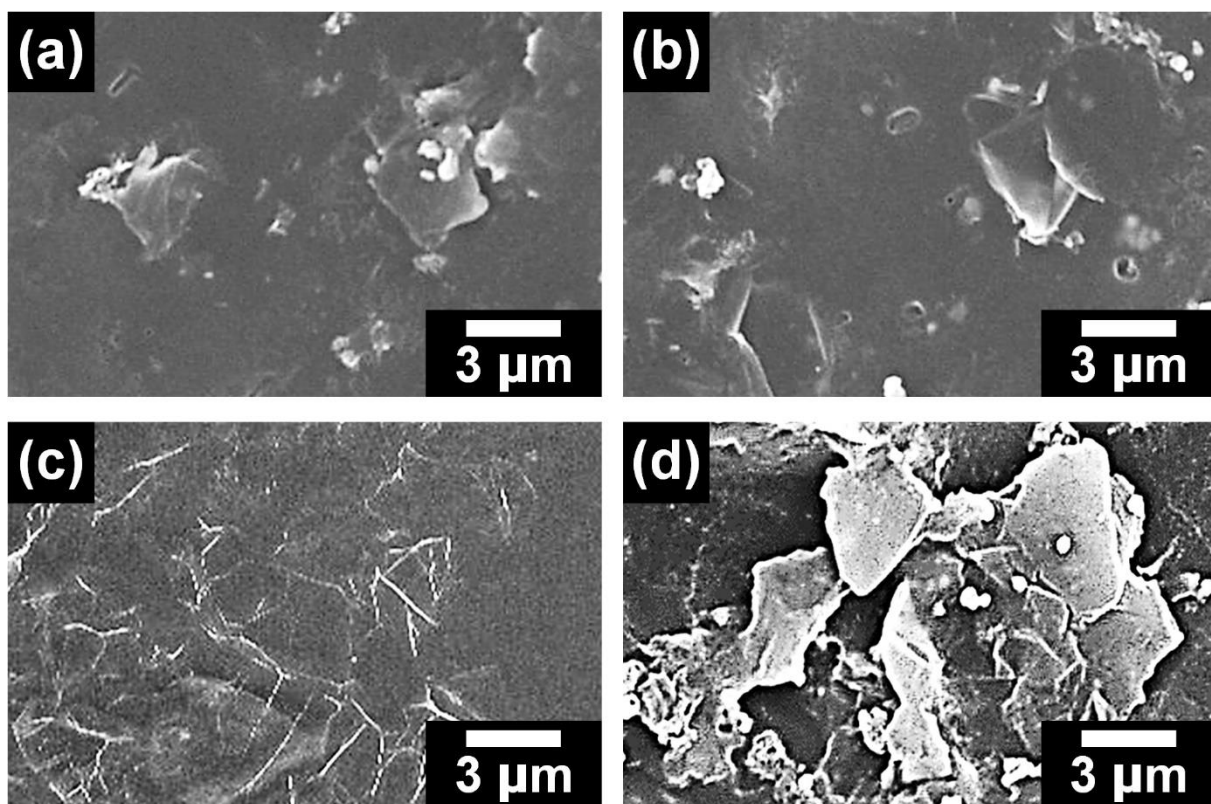


Figure S2. FE-SEM images of polyacrylate composites containing different PANI NF content: (a) 0.3 wt %, (b) 0.6 wt %, (c) 1.2 wt %, and (d) 2.5 wt %.

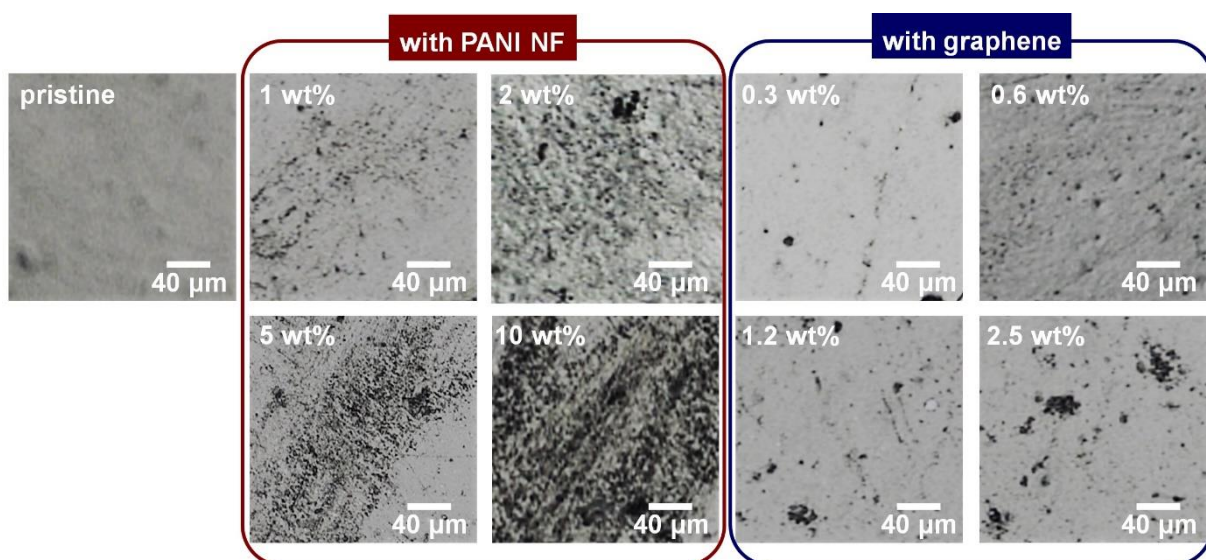


Figure S3. OM images of polyacrylate composites containing different contents of PANI NF and graphene.