

Supplementary

Comparative analysis of fluorinated anions for polypyrrole linear actuator electrolytes

Nguyen Quang Khuyen¹, ZaneZondaka², Madis Harjo², Janno Torop², Tarmo Tamm² and
Rudolf Kiefer^{1,*}

¹Conducting polymers in composites and applications Research Group, Faculty of Applied Sciences, Ton Duc Thang University, Ho Chi Minh City, Vietnam

²Intelligent Materials and Systems Lab, Faculty of Science and Technology, University of Tartu, Nooruse 1, 50411 Tartu, Estonia

*Corresponding author. Tel: +886 905605515. E-mail: rudolf.kiefer@tdtu.edu.vn (Rudolf Kiefer)

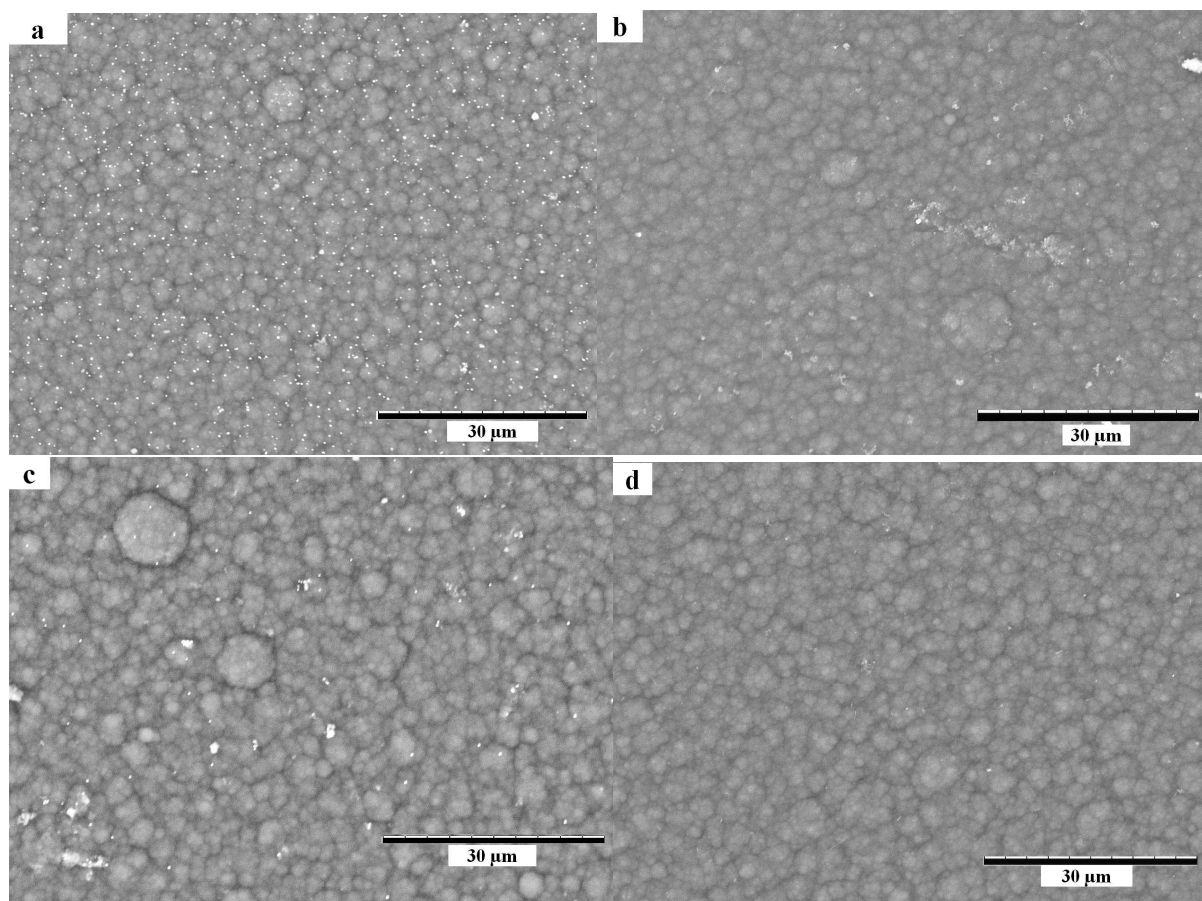


Figure S1: The SEM surface images at oxidation state (+1.0 V) (scale bar 30 μm) are shown for PPy/DBS films actuated in in a: LiTFSI, b: LiCF₃SO₃, c: TBACF₃SO₃ and d: TBAPF₆.