

Dual Thermal-/Electrical-Responsive Luminescent 'Smart' Window

Gilles H. Timmermans ¹, Robin F. Douma ¹, Jianbin Lin ² and Michael G. Debije ^{1,*}

¹ Stimuli-responsive Functional Materials and Devices, Chemical Engineering & Chemistry, Eindhoven University of Technology, 5600 MB Eindhoven, The Netherlands; g.h.timmermans@tue.nl (G.H.T.); r.f.douma@student.tue.nl (R.F.D.)

² Department of Chemistry, Xiamen University, Xiamen 361005, China; jb.lin@xmu.edu.cn (J.L.)

* Correspondence: m.g.debije@tue.nl (M.G.D.)

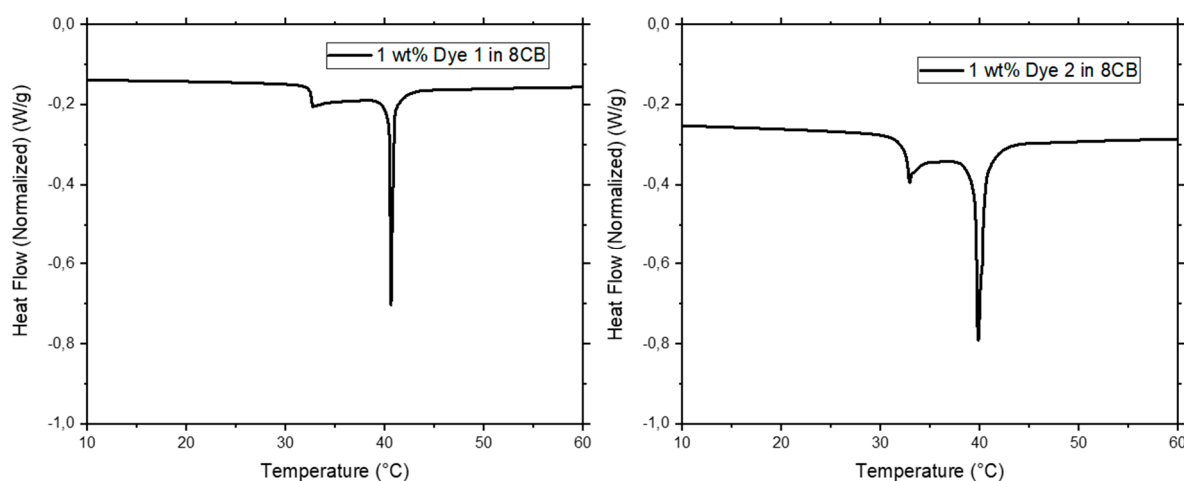


Figure S1. Differential scanning calorimetry of the 1 wt% (left) Dye 1 and (right) Dye 2 dye in 8CB.

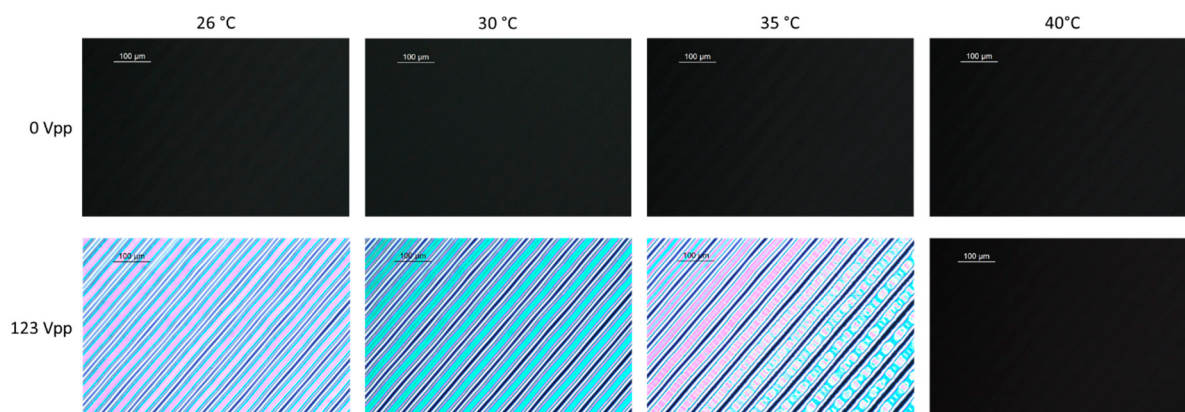


Figure S2. Polarized optical microscopy images of a IDE cell filled with 1 wt% of Dye 2 in 8CB at different temperatures and applied voltages.