



Paracetamol Sensing with a Pencil Lead Electrode Modified with Carbon Nanotubes and Polyvinylpyrrolidone

Piyanut Pinyou 1,*, Vincent Blay 2, Kantapat Chansaenpak 3 and Sireerat Lisnund 4,*

- School of Chemistry, Institute of Science, Suranaree University of Technology, 111 University Avenue, Suranaree, Muang, Nakhon Ratchasima 30000, Thailand
- ² Division of Biomaterials and Bioengineering, University of California San Francisco, 513 Parnassus Ave, San Francisco, CA 94143, USA; vincent.blayroger@ucsf.edu
- ³ National Nanotechnology Center, National Science and Technology Development Agency, Thailand Science Park, Pathum Thani 12120, Thailand; kantapat.cha@nanotec.or.th
- Department of Applied Chemistry, Faculty of Science and Liberal Arts, Rajamangala University of Technology Isan, 744, Suranarai Rd., Nakhon Ratchasima 30000, Thailand
- * Correspondence: piyanutp@sut.ac.th (P.P.); sireerat.in@rmuti.ac.th (S.L.)

Received: 12 November 2020; Accepted: 11 December 2020; Published: date




Figure S1. Home-made PGE design as seen from the side (left) and zoom-in on the probing end as seen from the bottom (right).

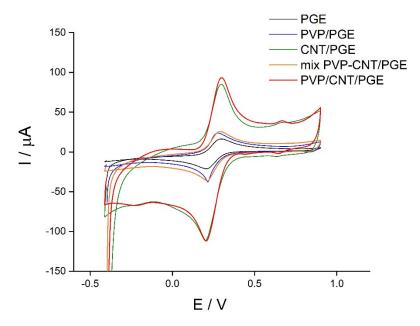


Figure S2. Cyclic voltammograms of 5 mM K_3 [Fe(CN)₆] containing 0.1 M KCl, scan rate 50 mV/s for the investigation of electroactive surface of the electrodes with different modification.

Chemosensors **2021**, *8*, 133




Figure S3. The plot of the pH of the peak current vs. pH.

Publisher's Note: MDPI stays neutral with regard to jurisdictional claims in published maps and institutional affiliations.



© 2020 by the authors. Licensee MDPI, Basel, Switzerland. This article is an open access article distributed under the terms and conditions of the Creative Commons Attribution (CC BY) license (http://creativecommons.org/licenses/by/4.0/).