

Supplementary Materials: Transparent Thin-Film Transistors Based on Sputtered Electric Double Layer

Wensi Cai, Xiaochen Ma, Jiawei Zhang, and Aimin Song

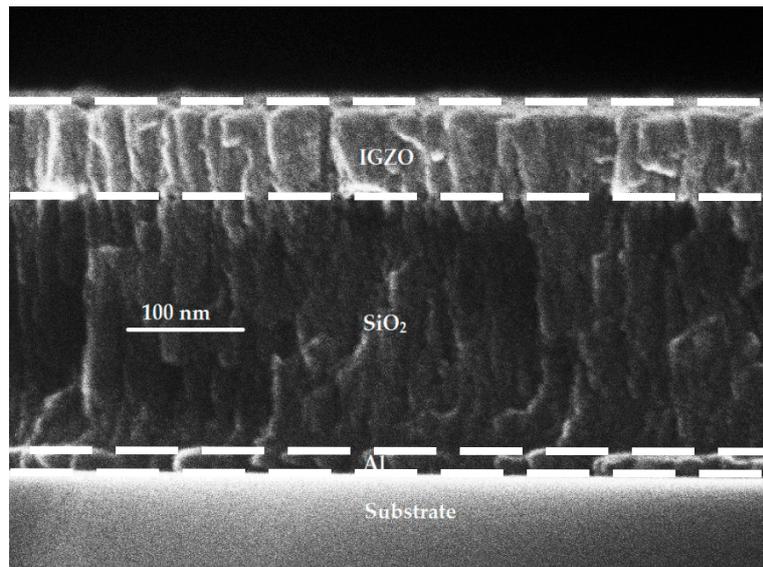


Figure S1. Cross-sectional SEM image of the sputtered SiO₂ electrolyte.

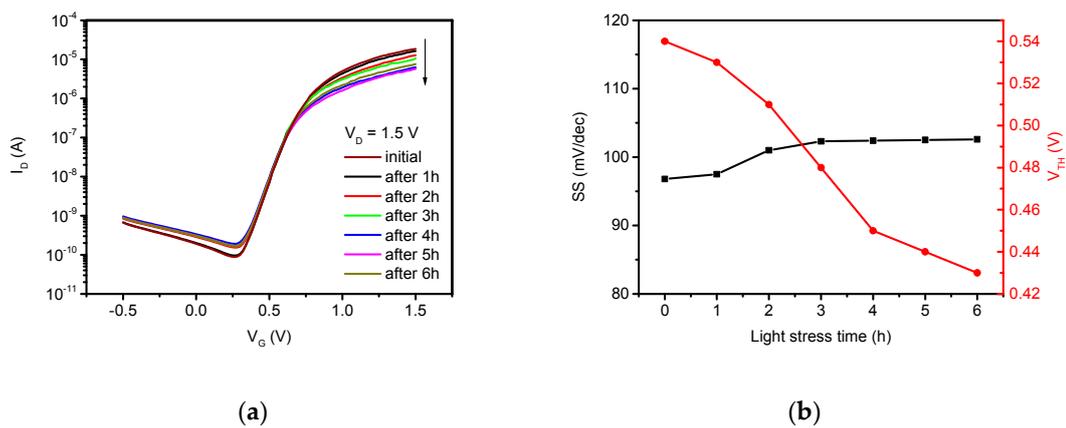


Figure S2. (a) Transfer characteristics, (b) threshold voltage and subthreshold swing of the TFT after white-light stress (around 2000 lx) for several durations.