

Supplementary Materials:

The relationship between bulk silicone and benzophenone-initiated hydrogel coating properties

Damla Keskin ¹, Taraneh Mokabbar ², Yutao Pei ², Patrick van Rijn ^{1,3,*}

¹ University of Groningen, University Medical Center Groningen, Department of Biomedical Engineering-FB40, W.J. Kolff Institute for Biomedical Engineering and Materials Science-FB41, A. Deusinglaan 1, 9713 AV Groningen, The Netherlands; d.keskin@umcg.nl (D.K.); : p.van.rijn@umcg.nl (P.R.)

² University of Groningen, Engineering and Technology Institute Groningen, Nijenborgh 4, 9747 AG Groningen, The Netherlands; t.mokabbar@rug.nl (T.M.); y.pei@rug.nl (Y.P.)

³ University of Groningen, Zernike Institute for Advanced Materials, Nijenborgh 4, 9747 AG Groningen, The Netherlands

* Correspondence: p.van.rijn@umcg.nl (P.R.); Tel.: +31-50-361-6066

CONTENTS:

S1 Si (at%) amount as a function of distance

S1 Si (at%) amount as a function of distance

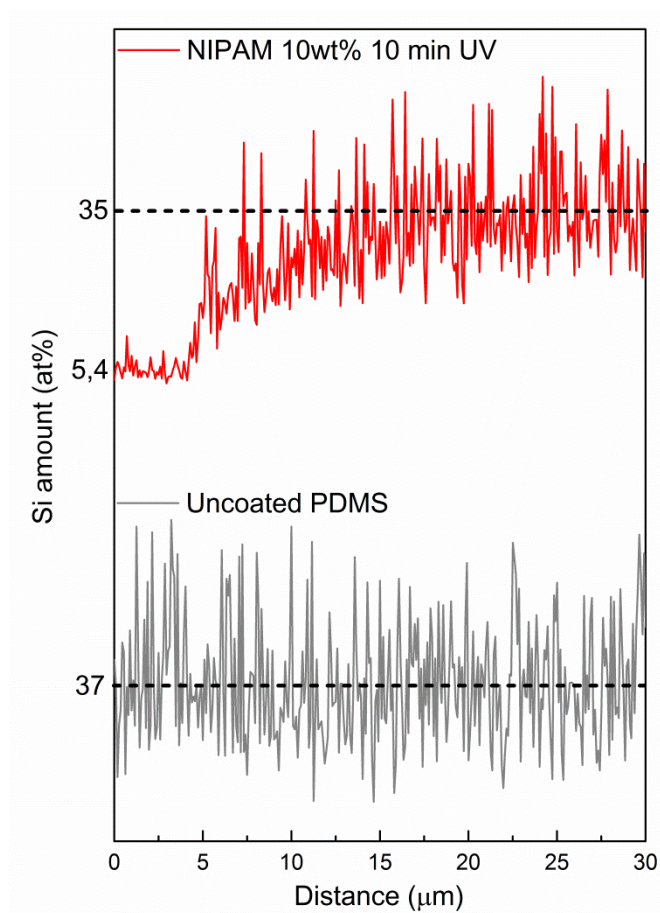


Figure S1: Si (at%) amount of uncoated PDMS surface and PDMS surface coated with NIPAM 10 wt% as a function of distance. Data extracted from SEM – EDX measurement.